


**521200**

Courbe 90° femelle/femelle.



## Spécifications techniques

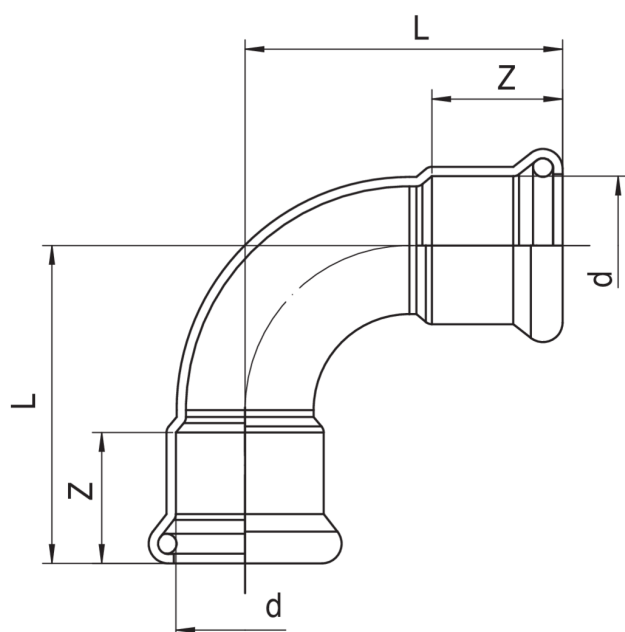

| D    | BAG | MASTER BOX | CODE      | L     | Z    |
|------|-----|------------|-----------|-------|------|
| 15   | 10  | 250        | 52120015  | 41    | 19   |
| 18   | 10  | 200        | 52120018  | 45    | 19,5 |
| 22   | 5   | 125        | 52120022  | 51    | 21   |
| 28   | 5   | 70         | 52120028  | 60,5  | 22   |
| 35   | 5   | 40         | 52120035  | 76,5  | 27   |
| 42   | 2   | 20         | 52120042  | 95,9  | 30   |
| 54   | 2   | 8          | 52120054  | 124,3 | 35   |
| 76,1 | 1   | 5          | 52120076  | 160   | 54   |
| 88,9 | 1   | 2          | 52120088  | 185   | 61   |
| 108  | 1   | 1          | 521200108 | 250   | 76   |

## Applications



DRINKING  
WATER



HEATING



HVAC



COMPRESSED  
AIR



INDUSTRIAL



MARINE