


5942

Kugelhahn Volldurchgang AG-AG für Sauerstoff, Öl und fettfrei.

NEW

## Technische Spezifikationen

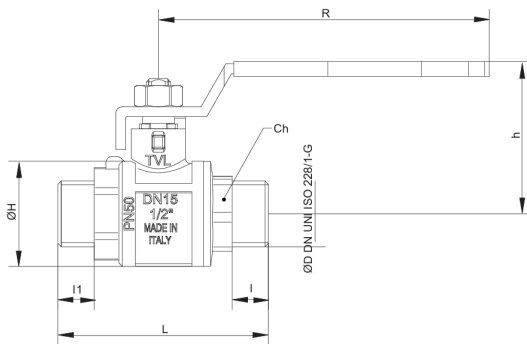

| ØP | I  | L    | ØH | CH | R   | H  | KV   | PN | KG   |
|----|----|------|----|----|-----|----|------|----|------|
| 10 | 12 | 50   | 28 | 21 | 100 | 44 | 9,4  | 63 | 0,19 |
| 12 | 12 | 50,3 | 28 | 21 | 100 | 44 | 17   | 63 | 0,26 |
| 15 | 17 | 61   | 32 | 25 | 100 | 46 | 39,2 | 50 | 0,36 |
| 20 | 19 | 70   | 39 | 30 | 100 | 49 | 62   | 50 | 0,48 |

Temperature range: -10°C +60°C.

## Anwendungen



DRINKING  
WATER



HEATING



HVAC



COMPRESSED  
AIR



INDUSTRIAL



MARINE