


1630

Messingkugelhahn, voller Durchgang, beiderseits Innengewinde, mit ISO-T-Griff aus Polyamid.



Technische Spezifikationen

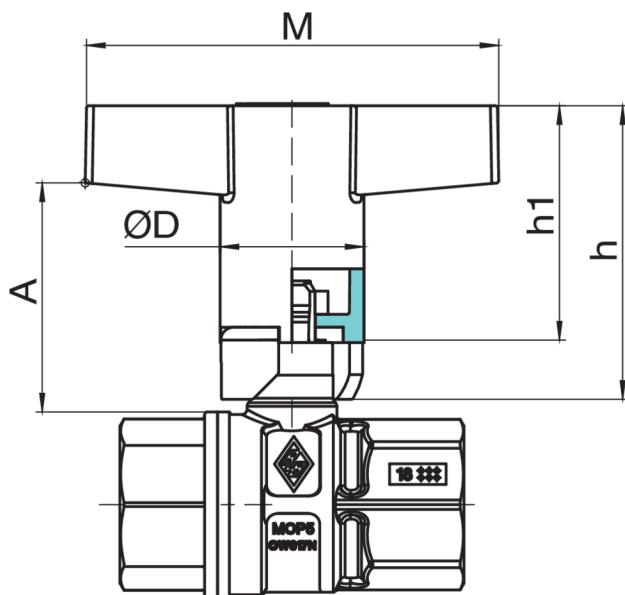

| GRÖSSE | DN | BOX | MASTER BOX | CODE | ØD | H | H1 | M | A | PN | KG |
|--------|----|-----|------------|------------|----|------|------|-----|------|----|------|
| 1/2" | 15 | 25 | 50 | 1630040000 | 28 | 55 | 45,5 | 80 | 41 | 50 | 0,17 |
| 3/4" | 20 | 20 | 40 | 1630050000 | 28 | 57 | 45,5 | 80 | 45 | 40 | 0,28 |
| 1" | 25 | 15 | 30 | 1630060000 | 28 | 57 | 45,5 | 80 | 43,5 | 40 | 0,44 |
| 1"1/4 | 32 | 6 | 12 | 1630070000 | 38 | 82,3 | 67,5 | 120 | 64 | 40 | 0,75 |
| 1"1/2 | 40 | 4 | 8 | 1630080000 | 38 | 82,3 | 67,5 | 120 | 63,5 | 40 | 1,03 |
| 2" | 50 | 2 | 4 | 1630100000 | 38 | 82,3 | 67,5 | 120 | 66,5 | 40 | 1,80 |

Temperature range: -20°C +160°C.

Anwendungen



DRINKING
WATER



HEATING



HVAC



COMPRESSED
AIR



INDUSTRIAL



MARINE