



5869

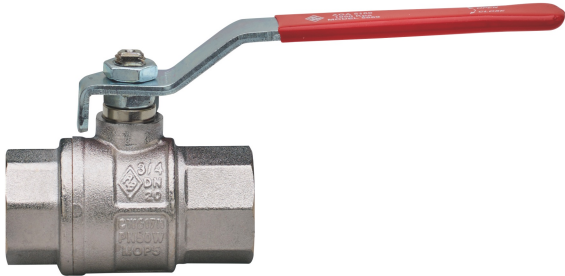

Kugelhahn mit vollem Durchgang, beiderseits Innengewinde nach UNI EN 10226-1 Rc, mit Stahlhebel und rotem PVC Überzug.

## Technische Spezifikationen

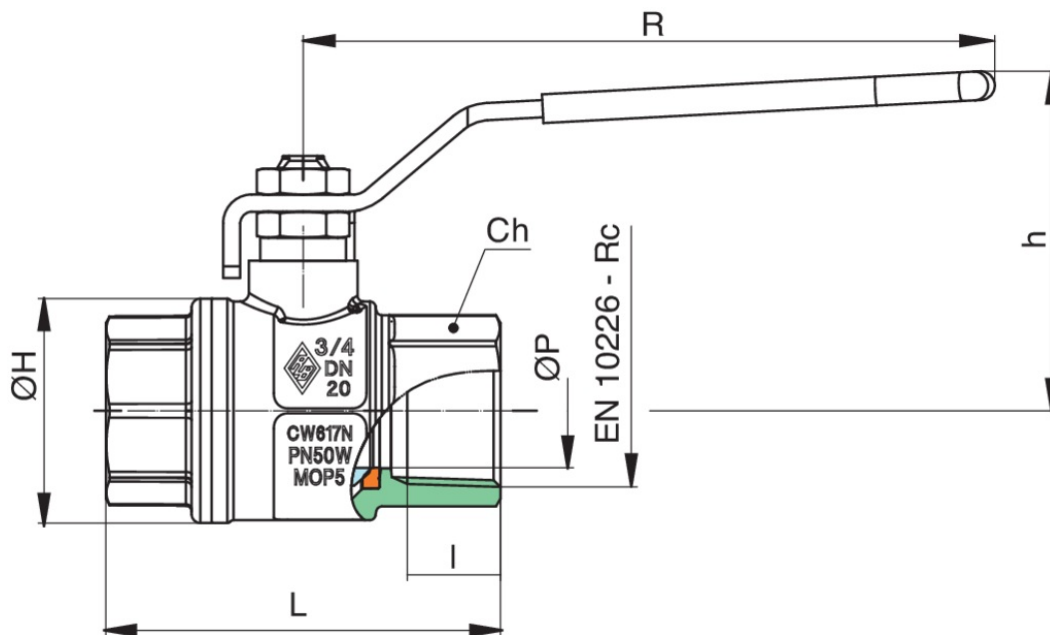

GRÖSSE	DN	BOX	MASTER BOX	CODE	ØP	I	L	ØH	CH	R	H	KV	PN	KG
1/4"	8	20	80	5869020000	10	11	51,5	23	20	95	43	5,4	64	0,15
3/8"	10	20	80	5869030000	10	11,4	51,5	23	20	95	43	6	64	0,14
1/2"	15	20	80	5869040000	15	15	62	33	25	95	47	16,3	50	0,21
3/4"	20	10	40	5869050000	20	16,3	69	39	31	120	59	29,5	50	0,36
1"	25	10	20	5869060000	25	19,1	83	49	38	120	63	43	50	0,55
1"1/4	32	6	12	5869070000	32	21,4	96	59	48	150	76	89	50	0,93
1"1/2	40	4	8	5869080000	40	21,4	108	73	54	150	82	230	40	1,32
2"	50	2	4	5869100000	50	25,7	127,5	86	67	160	95	265	40	2,03

Temperature range: -20°C +160°C.

# Anwendungen



DRINKING WATER



HEATING



HVAC



COMPRESSED AIR



INDUSTRIAL



MARINE