


3861

Kugelhahn, IG/AG, verchromt und sandgestrahlt, mit Schraubenzieher zu betätigen.



Technische Spezifikationen

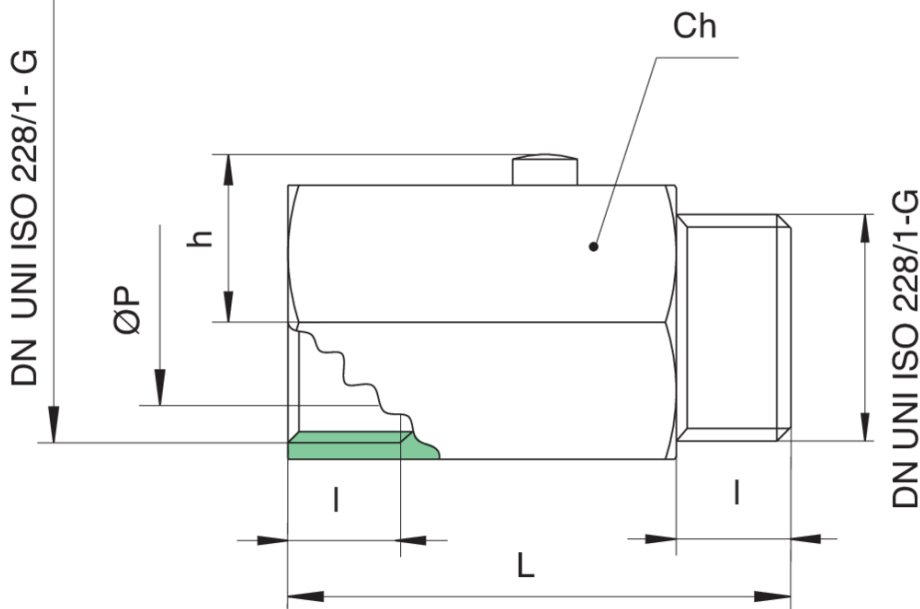

| GRÖSSE | DN | BOX | MASTER BOX | CODE | ØP | I | H | CH | L | KV | PN | KG |
|--------|----|-----|------------|------------|----|----|------|----|----|-----|----|------|
| 1/8" | 6 | 50 | 300 | 3861010000 | 8 | 8 | 13,8 | 21 | 41 | 4,3 | 10 | 0,08 |
| 1/4" | 8 | 50 | 300 | 3861020000 | 8 | 10 | 13,8 | 21 | 41 | 4,3 | 10 | 0,08 |
| 3/8" | 10 | 50 | 300 | 3861030000 | 8 | 10 | 13,8 | 21 | 41 | 2,7 | 10 | 0,07 |
| 1/2" | 15 | 40 | 240 | 3861040000 | 10 | 11 | 15,8 | 25 | 46 | 5,4 | 10 | 0,12 |

Temperature range: -20°C +90°C.

Anwendungen



DRINKING WATER



HEATING



HVAC



COMPRESSED AIR



INDUSTRIAL



MARINE