


Halbe Verschraubung flachdichtend.



Technische Spezifikationen

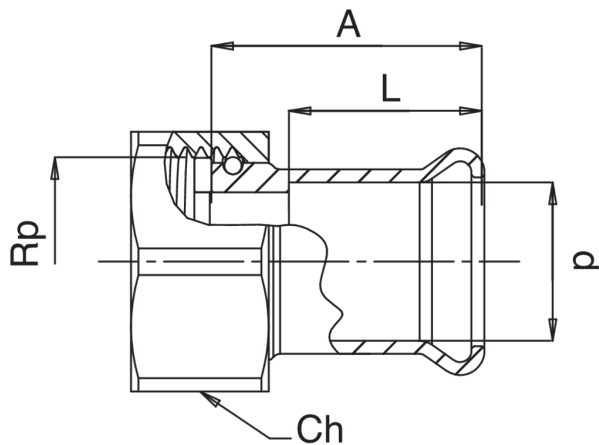

| D x Rp | BAG | MASTER BOX | CODE | A | CH | L |
|------------|-----|------------|-----------------|----|------|----|
| 15 x 1/2" | 5 | 100 | CMF359A12015000 | 40 | 24 | 20 |
| 15 x 3/4" | 5 | 100 | CMF359A34015000 | 28 | 30 | 20 |
| 18 x 3/4" | 5 | 100 | CMF359A34018000 | 32 | 30 | 20 |
| 22 x 3/4" | 5 | 100 | CMF359A34022000 | 47 | 30 | 23 |
| 22 x 1" | 5 | 100 | CMF359B01022000 | 34 | 37 | 22 |
| 28 x 1" | 5 | 80 | CMF359B01028000 | 37 | 48,5 | 22 |
| 28 x 1 1/4 | 10 | 50 | CMF359B14028000 | 31 | 46 | 23 |
| 28 x 1 1/2 | 5 | 30 | CMF359B12028000 | - | - | - |
| 35 x 1 1/4 | 5 | 60 | CMF359B14035000 | 47 | 56,5 | 27 |
| 35 x 1 1/2 | 5 | 30 | CMF359B12035000 | 40 | 46 | 26 |
| 42 x 1 1/2 | 2 | 54 | CMF359B12042000 | 52 | 61 | 30 |
| 54 x 2" | 2 | 30 | CMF359C02054000 | 64 | 71,5 | 35 |

Anwendungen



HEATING

HVAC

COMPRESSED
AIR