


## 9F40



Steel cross beam, center distance 110 mm, with brass threaded EN 10226-1 union tail and pressure measurement connection, without fixing plate.



### Technical specifications

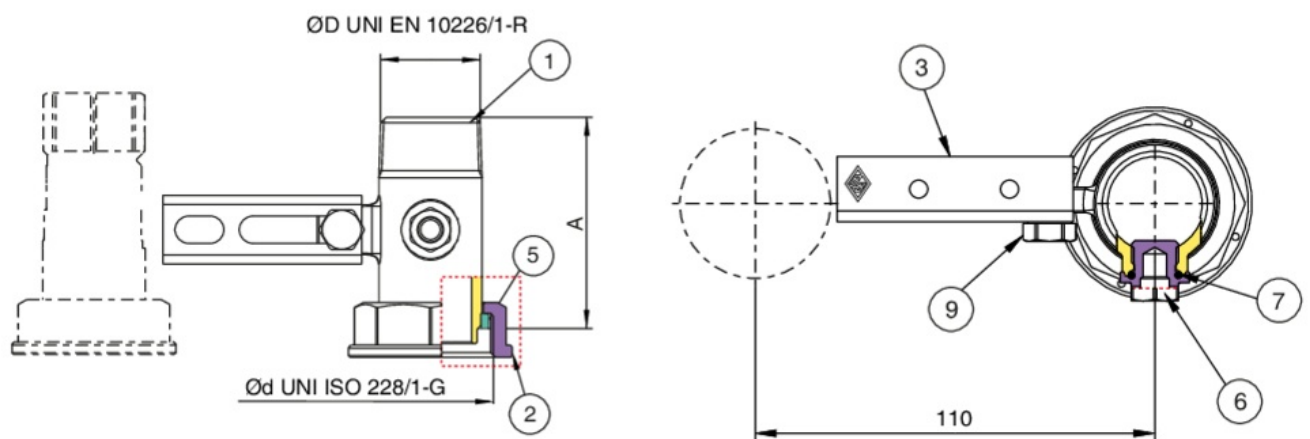

POSITION	PART NAME	MATERIAL	TREATMENT	N.° PIECES
1	UNION TAIL	BRASS CW617N UNI EN 12165	SAND BLASTING	1
2	NUT	BRASS CW617N UNI EN 12165	ZINC TROPICALIZED	1
3	BEAM	STEEL S235JR UNI EN 10025	ZINC TROPICALIZED	1
4	SUPPORT	STEEL S235JR UNI EN 10025	ZINC TROPICALIZED	1
5	RING	BRASS CW614 UNI EN 12164	SAND BLASTING	1
6	CAP	BRASS CW614 UNI EN 12164	SAND BLASTING	1
7	O-RING	NBR	-	1
8	NUT	STEEL	ZINC COATING	1
9	SCREW	STEEL	ZINC COATING	2
10	UNION TAIL	STEEL S235JR UNI EN 10025	ZINC TROPICALIZED	1
11	CIRCLIP	STAINLESS STEEL AISI 302	SOLUBILIZATION	1
12	FLEXIBLE METAL HOSE	STAINLESS STEEL AISI 316L	SOLUBILIZATION	1

ØD X ØD	MASTER BOX	CODE	A
1" x 1"1/4	25	9F40290000	69,5

## Applications



GAS