


Copper F/F coupling.



Technical specifications

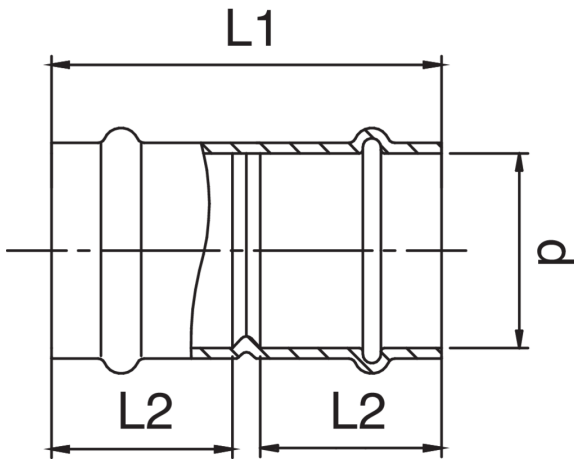

| D | BAG | MASTER BOX | CODE | L1 | L2 |
|----|-----|------------|-----------------|----|----|
| 12 | 10 | 300 | RS9270012012000 | 40 | 18 |
| 15 | 10 | 200 | RS9270015015000 | 49 | 22 |
| 18 | 10 | 150 | RS9270018018000 | 52 | 23 |
| 22 | 10 | 100 | RS9270022022000 | 53 | 24 |
| 28 | 10 | 60 | RS9270028028000 | 57 | 25 |
| 35 | 5 | 40 | RS9270035035000 | 62 | 26 |
| 42 | 5 | 25 | RS9270042042000 | 78 | 36 |
| 54 | 1 | 15 | RS9270054054000 | 93 | 40 |

The big-size, item RR9270, is available.

Applications

