


600001

PATENTED



Brass butterfly valve full bore F/F threaded with throttling.

Technical specifications

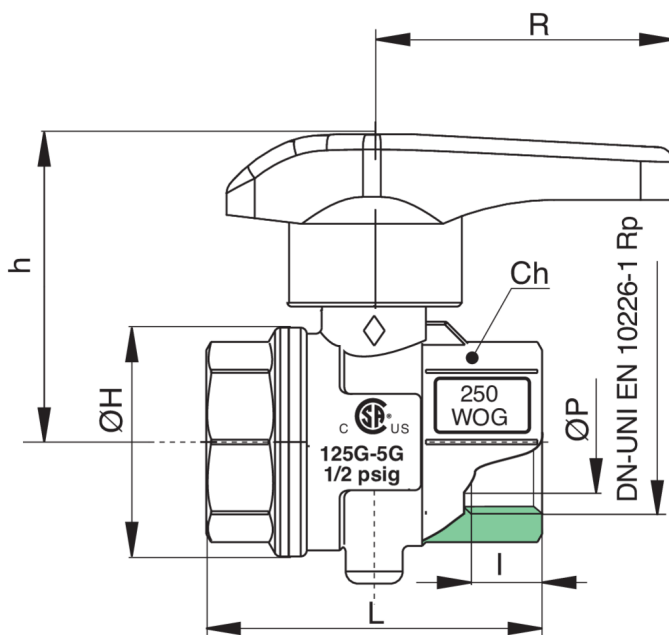

| SIZE | DN | BOX | MASTER BOX | CODE | ØP | I | CH | ØH | L | H | R | KV | PN | KG |
|------|----|-----|------------|----------|----|------|----|----|------|------|----|-----|----|------|
| 1/2" | 15 | 20 | 80 | 60000104 | 16 | 15 | 25 | 31 | 48,5 | 48 | 50 | 8,5 | 16 | 0,17 |
| 3/4" | 20 | 10 | 40 | 60000105 | 21 | 16,3 | 31 | 38 | 56 | 51,5 | 50 | 17 | 16 | 0,24 |
| 1" | 25 | 10 | 20 | 60000106 | 27 | 19,1 | 38 | 46 | 64 | 55 | 50 | 27 | 16 | 0,35 |

Temperature range: -10°C +130°C.

Applications



DRINKING WATER



HEATING



HVAC



COMPRESSED AIR



INDUSTRIAL



MARINE