


## 1530

Full bore ball valve, F/F, with extended polyamide ISO-T-handle, anticondensation and dripless.



### Technical specifications

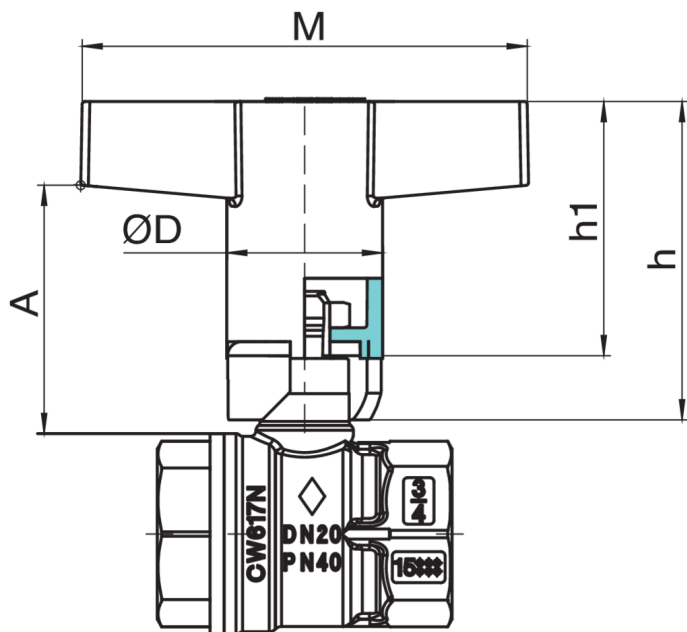

| SIZE  | DN | BOX | MASTER BOX | CODE       | ØD | H    | H1   | M   | A    | PN | KG   |
|-------|----|-----|------------|------------|----|------|------|-----|------|----|------|
| 1/2"  | 15 | 25  | 50         | 1530040000 | 28 | 55   | 45,5 | 80  | 41   | 50 | 0,14 |
| 3/4"  | 20 | 20  | 40         | 1530050000 | 28 | 57   | 45,5 | 80  | 45   | 40 | 0,24 |
| 1"    | 25 | 15  | 30         | 1530060000 | 28 | 57   | 45,5 | 80  | 43,5 | 40 | 0,37 |
| 1"1/4 | 32 | 6   | 12         | 1530070000 | 38 | 82,3 | 67,5 | 120 | 64   | 40 | 0,62 |
| 1"1/2 | 40 | 4   | 8          | 1530080000 | 38 | 82,3 | 67,5 | 120 | 63,5 | 40 | 0,91 |
| 2"    | 50 | 2   | 4          | 1530100000 | 38 | 82,3 | 67,5 | 120 | 66,5 | 40 | 1,55 |

Temperature range: -20°C +160°C.

## Applications



DRINKING  
WATER



HEATING



HVAC



COMPRESSED  
AIR



INDUSTRIAL



MARINE