


1810

Full bore ball valve, F/F threaded, with steel handle.

Technical specifications

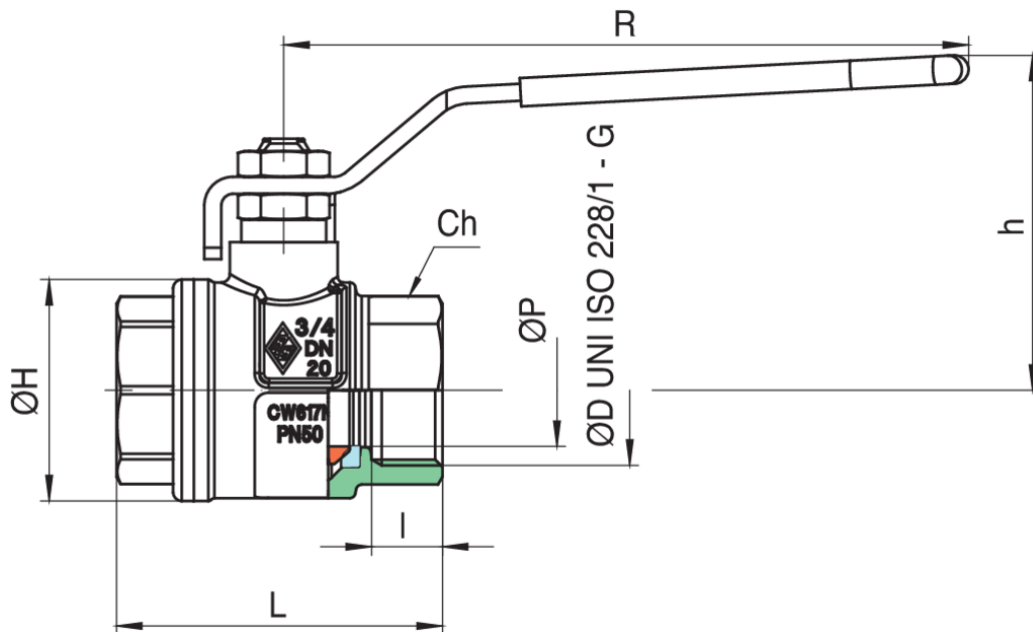

| SIZE | DN | BOX | MASTER BOX | CODE | ØP | I | L | ØH | CH | R | H | KV | PN | KG |
|--------|-----|-----|------------|------------|-----|------|------|-----|-----|-----|------|------|----|-------|
| 1/4** | 8 | 20 | 80 | 1710020000 | 10 | 11 | 51,5 | 23 | 20 | 95 | 43 | 5,4 | 64 | 0,15 |
| 3/8** | 10 | 20 | 80 | 1710030000 | 10 | 11,4 | 51,5 | 23 | 20 | 95 | 43 | 6 | 64 | 0,14 |
| 1/2" | 15 | 20 | 80 | 1810040000 | 15 | 13,5 | 55 | 33 | 25 | 96 | 47 | 16,3 | 64 | 0,20 |
| 3/4" | 20 | 10 | 40 | 1810050000 | 20 | 12,5 | 57,5 | 39 | 31 | 120 | 59 | 29,5 | 50 | 0,26 |
| 1" | 25 | 10 | 20 | 1810060000 | 25 | 15 | 69,5 | 49 | 38 | 120 | 63 | 43 | 50 | 0,49 |
| 1"1/4 | 32 | 6 | 12 | 1810070000 | 32 | 17 | 81,5 | 59 | 48 | 150 | 76,5 | 89 | 50 | 0,81 |
| 1"1/2 | 40 | 4 | 8 | 1810080000 | 40 | 18 | 95 | 73 | 54 | 150 | 82,5 | 230 | 40 | 1,17 |
| 2" | 50 | 2 | 4 | 1810100000 | 50 | 22 | 113 | 87 | 67 | 160 | 95 | 265 | 40 | 1,87 |
| 2"1/2* | 65 | 2 | 4 | 1710120000 | 65 | 30,2 | 152 | 111 | 90 | 206 | 123 | 540 | 25 | 3,73 |
| 3** | 80 | 0 | 4 | 1710140000 | 80 | 33,3 | 177 | 136 | 105 | 206 | 133 | 873 | 25 | 5,95 |
| 4** | 100 | 0 | 2 | 1710180000 | 100 | 39,3 | 214 | 166 | 130 | 261 | 165 | 1390 | 25 | 10,57 |

Temperature range: -20°C +160°C.

*Art. [1710](#)

Applications



DRINKING
WATER



HEATING



HVAC



COMPRESSED
AIR



INDUSTRIAL



MARINE