


1820

Full bore ball valve, F/F threaded, with aluminium T-handle.



Technical specifications

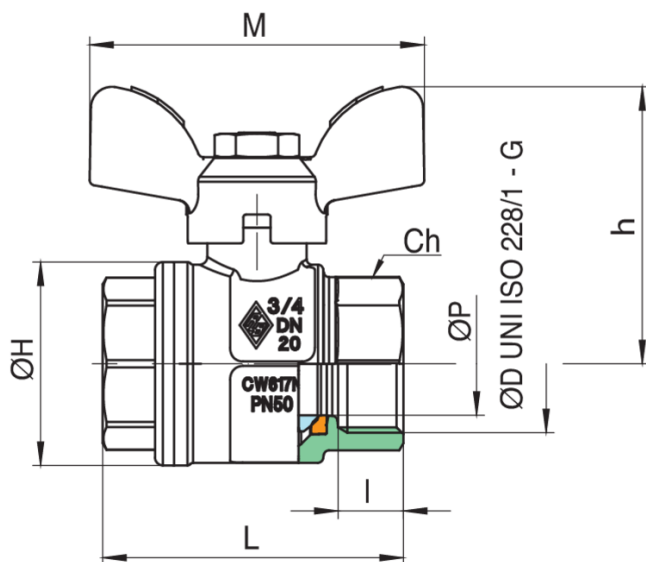

| SIZE | DN | BOX | MASTER BOX | CODE | ØP | I | L | ØH | CH | M | H | KV | PN | KG |
|-------|----|-----|------------|------------|----|------|------|----|----|----|------|------|----|------|
| 1/4** | 8 | 20 | 80 | 1720020000 | 10 | 11 | 51,5 | 23 | 20 | 50 | 37,5 | 5,4 | 64 | 0,14 |
| 3/8** | 10 | 20 | 80 | 1720030000 | 10 | 11,4 | 51,5 | 23 | 20 | 50 | 37,5 | 6 | 64 | 0,12 |
| 1/2" | 15 | 20 | 80 | 1820040000 | 15 | 13,5 | 55 | 33 | 25 | 50 | 41 | 16,3 | 64 | 0,18 |
| 3/4" | 20 | 10 | 40 | 1820050000 | 20 | 12,5 | 57,5 | 39 | 31 | 64 | 53 | 29,5 | 50 | 0,28 |
| 1" | 25 | 10 | 20 | 1820060000 | 25 | 15 | 69,5 | 49 | 38 | 64 | 57 | 43 | 50 | 0,46 |

Temperature range: -20°C +160°C.

*Art. [1720](#)

Applications



DRINKING
WATER



HEATING



HVAC



COMPRESSED
AIR



INDUSTRIAL



MARINE