


## 4030

Ball valve, F/F threaded, sandblasted and chrome plated, with handle.



### Technical specifications

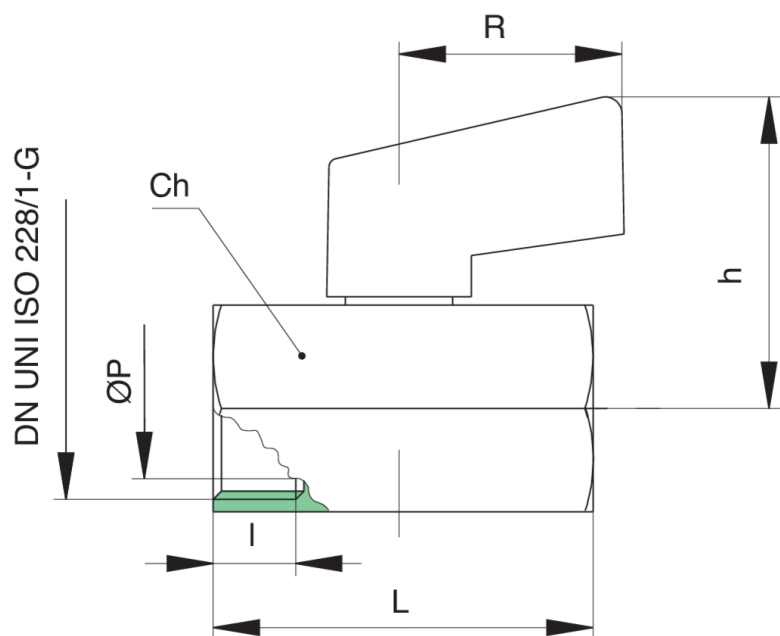

| SIZE | DN | BOX | MASTER BOX | CODE       | ØP | I  | L  | H    | R  | CH | KV  | PN | KG   |
|------|----|-----|------------|------------|----|----|----|------|----|----|-----|----|------|
| 1/4" | 8  | 40  | 240        | 4030020000 | 8  | 10 | 41 | 36,5 | 27 | 21 | 4,3 | 10 | 0,11 |
| 3/8" | 10 | 20  | 80         | 4030030000 | 8  | 10 | 41 | 36,5 | 27 | 21 | 2,7 | 10 | 0,10 |
| 1/2" | 15 | 20  | 80         | 4030040000 | 10 | 11 | 46 | 37,7 | 27 | 25 | 5,4 | 10 | 0,14 |

Temperature range: -20°C +150°C.

# Applications



DRINKING WATER



HEATING



HVAC



COMPRESSED AIR



INDUSTRIAL



MARINE