



Full bore ball valve for gas rising pipe, F/F threaded, with security lock and protection cap.

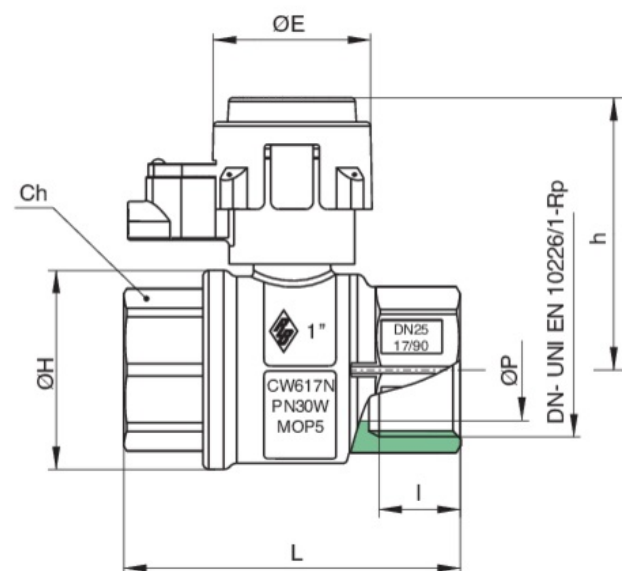

Technical specifications

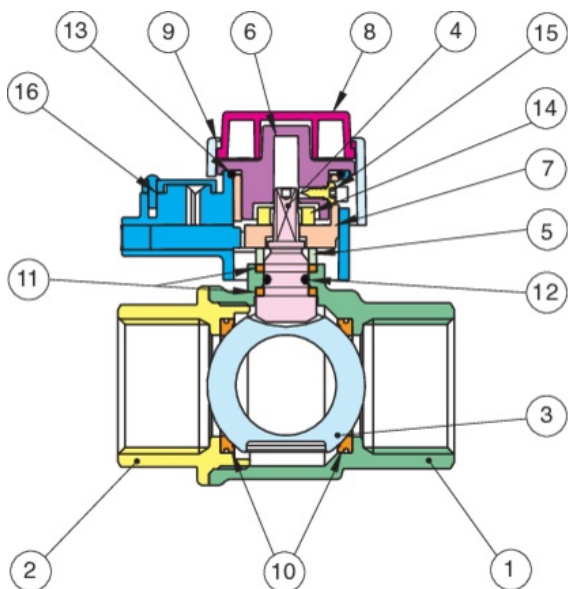

POSITION	PART NAME	MATERIAL	N.° PIECES
1	BODY	BRASS CW617N UNI EN 12165	1
2	END CONNECTION	BRASS CW617N UNI EN 12165	1
3	BALL	BRASS CW617N UNI EN 12165	1
4	STEM	BRASS CW614N UNI EN 12164	1
5	PACKING GLAND	BRASS CW614N UNI EN 12164	1
6	LOCKABLE CAP	ZAMA G Zn Al 4 UNI EN 1774	1
7	LOCK PROTECTION	BRASS CW614N UNI EN 12164	1
8	CAP	ABS	1
9	CAP	ABS	1
10	BALL SEAT	PTFE	2
11	STEM SEAL/THRUST WASHER	PTFE	2
12	O-RING	NBR	1
13	O-RING	NBR	1
14	NUT	STEEL CL 04	1
15	SCREW	STEEL	1
16	LOCK	ZAMA G Zn Al 4 UNI EN 1774	1

SIZE	DN	BOX	MASTER BOX	CODE	ØP	ØE	I	CH	ØH	L	H	MOP	KG
1"	25	10	20	9700060000	25	39	19,1	38	49	83	67	5	0,64
1"1/4	32	6	12	9700070000	32	39	21,4	48	59	96	83	5	1,00
1"1/2	40	4	8	9700080000	40	39	21,4	54	73	108	89	5	1,54
2"	50	2	4	9700100000	50	39	25,7	67	87	127,5	99	5	2,13

Temperature range: -20°C +60°C.

Applications



GAS