



## 6166

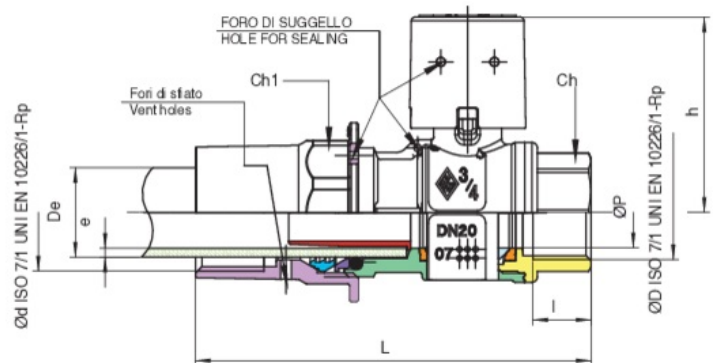

Full bore ball valve for gas for riser pipe, with sealable cap, female threaded and PE connection, with fitting for protection steel pipe.

### Technical specifications

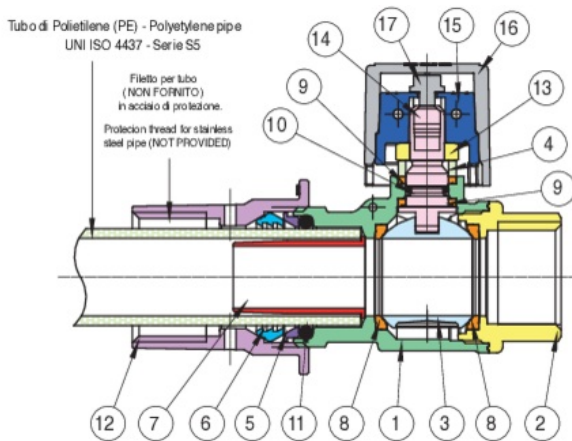

POSITION	PART NAME	MATERIAL	N.° PIECES
1	BODY	BRASS CW617N UNI EN 12165	1
2	END CONNECTION	BRASS CW617N UNI EN 12165	1
3	BALL	BRASS CW617N UNI EN 12165	1
4	PACKING GLAND	BRASS CW614N UNI EN 12164	1
5	PACKING GLAND	BRASS CW614N UNI EN 12164	1
6	ANTIUNTHREADING RING	BRASS CW614N UNI EN 12164	1
7	SUPPORT	BRASS CW614N UNI EN 12164	1
8	BALL SEAT	PTFE	2
9	ANTIFRICTION SEAT	PTFE	2
10	O-RING	NBR	1
11	O-RING	NBR	1
12	NUT	BRASS CW617N UNI EN 12165	1
13	NUT	BRASS CW617N UNI EN 12165	1
14	STEM	BRASS CW614N UNI EN 12164	1
15	LOCKABLE CAP	ZAMA/G Zn Al4 ALLOY UNI 3717	1
16	CAP	PE	1
17	SCREW	STEEL CL 4.8	1

ØD X DE	DN	ØD UNI EN 10226-1 RP	BOX	MASTER BOX	CODE	ØP	I	E	L	H	CH	CH1	MOP	KG
3/4"x25	20	1"	10	40	6166050025	20	16,3	2,5	110,5	54,5	31	40	5	0,54
1"x32	25	1"1/4	10	20	6166060032	25	19,1	3	128	58	38	50	5	0,82
1"1/4x40	32	1"1/2	6	12	6166070040	32	21,4	3,7	147,5	69	48	60	5	1,27
1"1/2x50	40	2"	4	8	6166080050	40	21,4	4,6	167	75	54	70	5	1,87
2"x63	50	2"1/2	2	4	6166100063	50	25,7	5,8	194,5	89	67	85	5	2,53

Temperature range: -20°C +60°C.

## Applications



GAS