


100210

T.E.A.® check valve, reduced bore, UNI ISO 228/1-G
F/F threaded.



Technical specifications

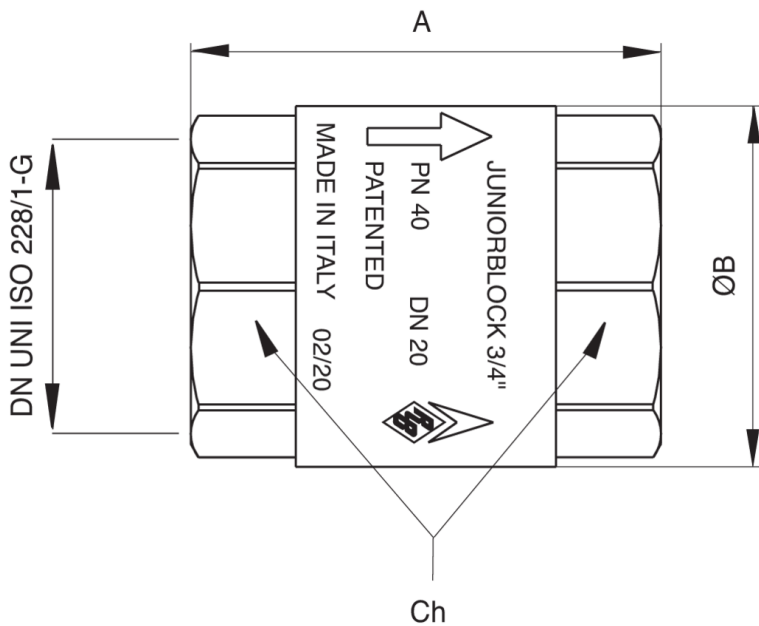

SIZE	DN	BOX	MASTER BOX	CODE	I	CH	ØB	A	KV	PN	KG
1/2"	15	20	160	10021004	12	25	28	44,5	3,7	40	0,10
3/4"	20	10	80	10021005	12	31	34,5	47,5	5,8	40	0,16
1"	25	10	80	10021006	14,5	38	42	56	8,6	25	0,25
1"1/4	32	6	12	10021007	16	48	52	62	13,8	25	0,40
1"1/2	40	4	8	10021008	18	54	61	70	20,2	16	0,58
2"	50	2	4	10021010	19	67	73	78	30,9	16	0,88

Temperature range: -20°C +100°C.

Applications



DRINKING
WATER