


100401

Swing check valve with rubber seat, F/F threaded.



Technical specifications

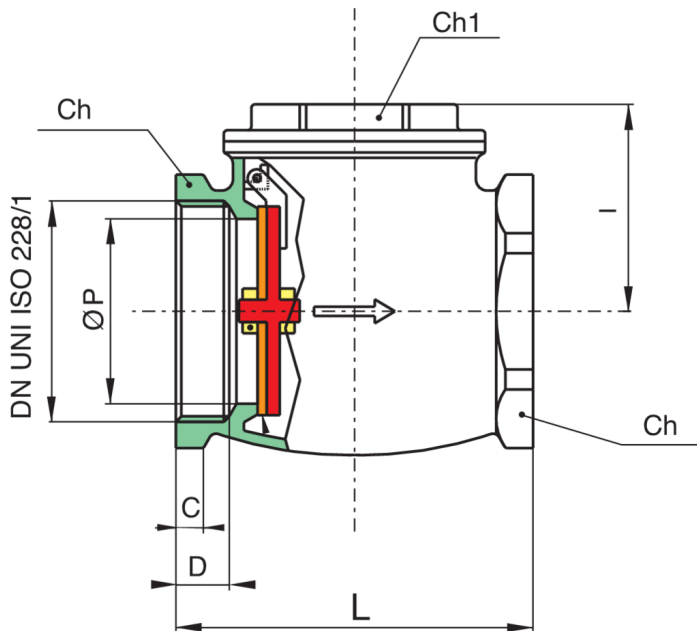

SIZE	DN	BOX	MASTER BOX	CODE	ØP	I	L	CH	CH1	D	C	PN	KG
1/2"	15	15	60	10040104	15	32	47	25	20	11,5	8	10	0,16
3/4"	20	10	40	10040105	20	34	53	31	26,5	11	8	10	0,23
1"	25	10	40	10040106	25	40	64	38	26	14	10	10	0,35
1"1/4	32	6	12	10040107	33	47	74	47	34,5	13,5	10	10	0,47
1"1/2	40	4	8	10040108	37	54	87	54	39,5	13,5	10	10	0,73
2"	50	2	4	10040110	47	57	97	66	49,5	14,5	11	10	1,01
2"1/2	65	4	8	10040112	55	61,5	118	82	50,5	19	16	6	1,45
3"	80	2	4	10040114	70	77	135	97	57	18	16	6	2,35
4"	100	1	2	10040118	90	92	164	122	80,5	22	20	6	3,72

Temperature range: 0°C +100°C in absence of steam.

Applications



DRINKING
WATER