


5940

Válvula de bola de paso total H/H para oxígeno sin lubricante con manilla de acero.

NEW

Especificaciones técnicas

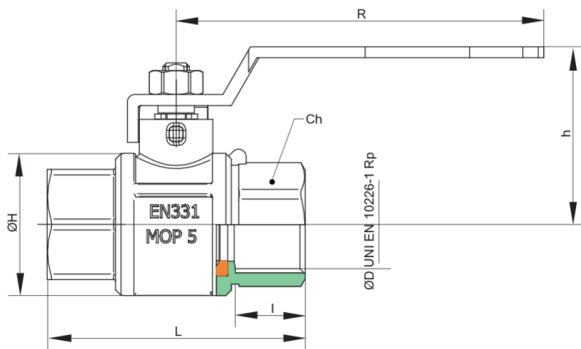

ØP	I	L	ØH	CH	R	H	KV	PN	KG
10	12	50	28	21	100	44	9,4	63	0,13
12	12	50,3	28	21	100	44	17	63	0,21
15	17	61	32	25	100	46	39,2	50	0,22
20	19	70	39	30	100	49	62	50	0,33
25	21	81	47,5	37	100	52,5	85,2	45	0,51
32	24	94	58	48	158	74,5	121	30	0,82
40	26	105	70	54	158	81	292	25	1,26
50	29	126	85	66	158	89	397	20	2,14

Temperature range: -10°C +60°C.

Aplicaciones



DRINKING
WATER



HEATING



HVAC



COMPRESSED
AIR



INDUSTRIAL



MARINE