


5941

Válvula de bola de paso total H/H para oxígeno sin lubricante con mariposa de acero.

NEW

Especificaciones técnicas

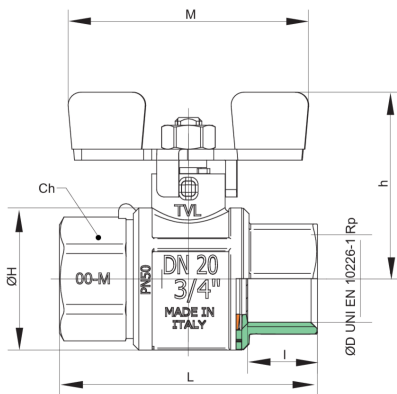

| ØP | I | L | ØH | CH | M | H | KV | PN | KG |
|----|----|------|------|----|----|------|------|----|------|
| 10 | 12 | 50 | 28 | 21 | 68 | 44 | 9,4 | 63 | 0,13 |
| 12 | 12 | 50,3 | 28 | 21 | 68 | 44 | 17 | 63 | 0,21 |
| 15 | 17 | 61 | 32 | 25 | 68 | 46 | 39,2 | 50 | 0,22 |
| 20 | 19 | 70 | 39 | 30 | 68 | 49 | 62 | 50 | 0,33 |
| 25 | 21 | 81 | 47,5 | 37 | 68 | 52,5 | 85,2 | 45 | 0,51 |

Temperature range: -10°C +60°C.

Aplicaciones



DRINKING
WATER



HEATING



HVAC



COMPRESSED
AIR



INDUSTRIAL



MARINE