



5945

Racor recto para soldar para oxígeno, con junta, sin lubricante.



NEW

Especificaciones técnicas

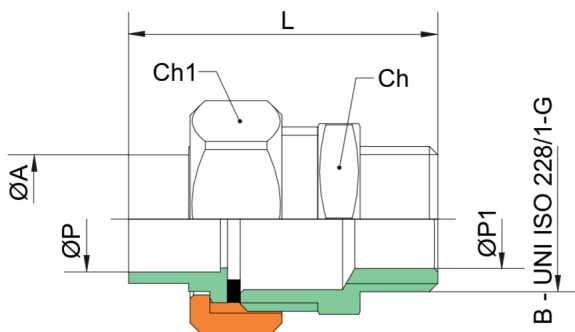

ØP	ØP1	L	CH	CH1	PN	KG
10	10	39	21	25	63	0,065
10	10	44	27	30	50	0,103
10	10	45	27	30	50	0,095
13	13	45	27	30	50	0,101
14	14	45	27	30	50	0,102
20	20	62	42	46	45	0,264
25	25	62	42	46	45	0,256
8	8	39	21	25	63	0,065
16	16	55	34	37	50	0,166
20	20	55	34	37	50	0,165

Temperature range: -10°C +110°C.

Aplicaciones



DRINKING
WATER



HEATING



HVAC



COMPRESSED
AIR



INDUSTRIAL



MARINE

