



1581



Válvula esfera de paso total, roscas macho/hembra, con capucho cerrable.

Especificaciones técnicas

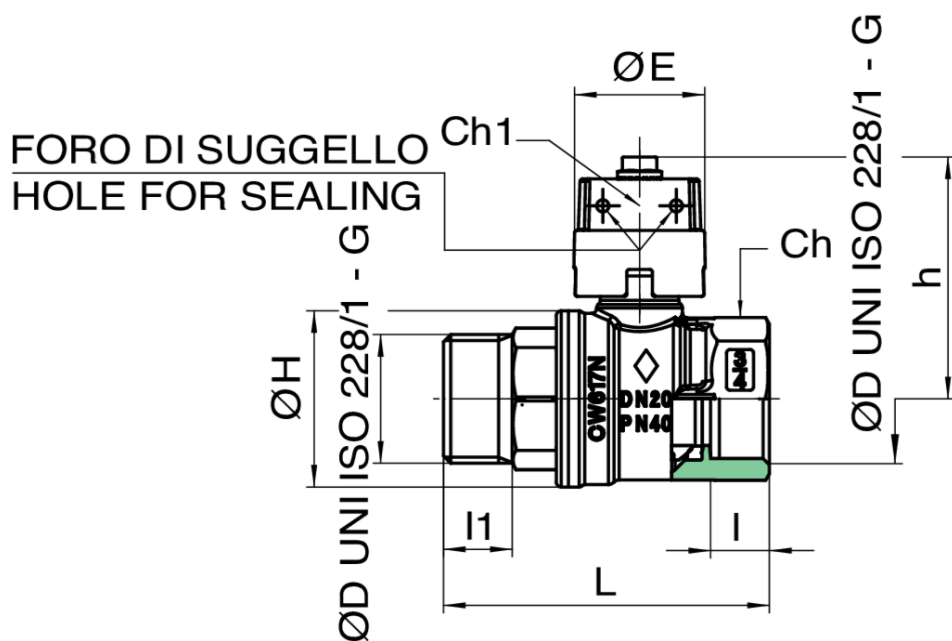

| TAMAÑO | DN | BOX | MASTER BOX | CÓDIGO | I | I1 | L | ØH | CH | CH1 | ØE | H | KV | PN | KG |
|--------|----|-----|------------|------------|------|----|--------|------|----|-----|------|------|------|----|------|
| 1/2" | 15 | 50 | 100 | 1581040000 | 12 | 13 | 59 | 30 | 22 | 12 | 23,5 | 41 | 16,3 | 30 | 0,17 |
| 3/4" | 20 | 25 | 50 | 1581050000 | 12 | 14 | 66,5 | 36 | 31 | 12 | 27 | 49,5 | 29,5 | 30 | 0,27 |
| 1" | 25 | 10 | 20 | 1581060000 | 14,5 | 15 | 77,75 | 43,5 | 38 | 12 | 27 | 52 | 43 | 30 | 0,41 |
| 1" 1/4 | 32 | 6 | 12 | 1581070000 | 16 | 17 | 91,25 | 53 | 48 | 12 | 32 | 62,5 | 89 | 25 | 0,69 |
| 1" 1/2 | 40 | 4 | 8 | 1581080000 | 18 | 18 | 104,75 | 65 | 67 | 12 | 32 | 68,5 | 230 | 25 | 0,98 |
| 2" | 50 | 2 | 4 | 1581100000 | 19 | 22 | 121 | 80 | 54 | 18 | 40 | 81,5 | 265 | 25 | 1,64 |

Temperature range: -20°C +160°C.

Aplicaciones



DRINKING WATER



HEATING



HVAC



COMPRESSED AIR



INDUSTRIAL



MARINE