


1620

Válvula esfera de paso total, hembra/hembra, con mariposa en aluminio.



Especificaciones técnicas

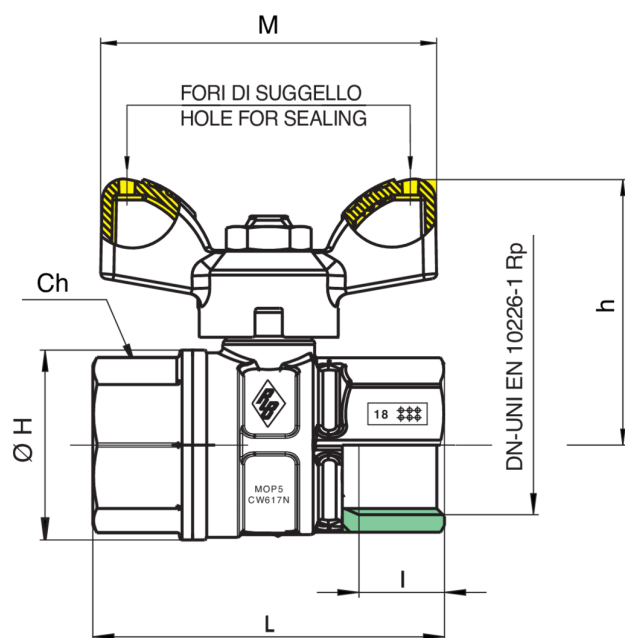

| TAMAÑO | DN | BOX | MASTER BOX | CÓDIGO | I | L | ØH | CH | M | H | KV | PN | KG |
|--------|----|-----|------------|------------|------|------|------|----|----|------|------|----|------|
| 1/4" | 8 | 20 | 80 | 1720020000 | 11 | 51,5 | 23 | 20 | 50 | 37,5 | 5,4 | 64 | 0,14 |
| 3/8" | 10 | 20 | 80 | 1720030000 | 11,4 | 51,5 | 23 | 20 | 50 | 37,5 | 6 | 64 | 0,12 |
| 1/2" | 15 | 20 | 80 | 1620040000 | 15 | 59 | 30 | 25 | 50 | 41 | 16,3 | 50 | 0,17 |
| 3/4" | 20 | 10 | 40 | 1620050000 | 16,3 | 67 | 36 | 31 | 64 | 51 | 29,5 | 40 | 0,27 |
| 1" | 25 | 10 | 20 | 1620060000 | 19,1 | 81,5 | 43,5 | 38 | 64 | 53 | 43 | 40 | 0,43 |

Temperature range: -20°C +160°C.

*Art. [1720](#)

Aplicaciones



DRINKING
WATER



HEATING



HVAC



COMPRESSED
AIR



INDUSTRIAL



MARINE