


EURO-SFER

5940



Válvula esfera desengrasada a paso total, roscas hembra/hembra, con palanca en aluminio **para oxígeno no médico**.

Especificaciones técnicas

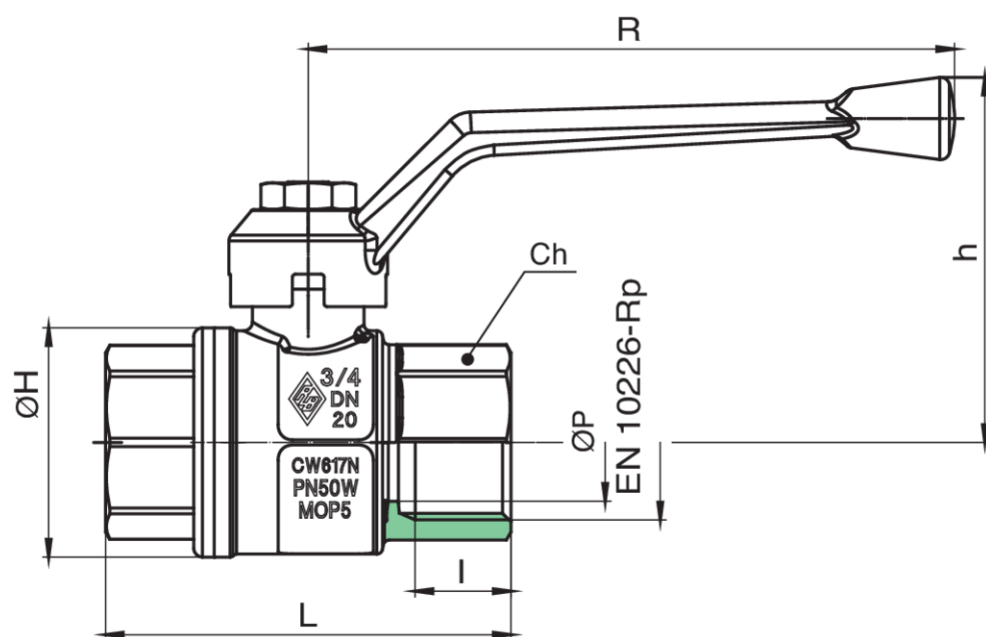

TAMAÑO	DN	BOX	MASTER BOX	CÓDIGO	ØP	I	L	ØH	CH	R	H	KV	PN	KG
1/4"	8	20	80	5940020000	10	11	51,5	23	20	95	46,5	5,4	64	0,14
3/8"	10	20	80	5940030000	10	11,4	51,5	23	20	95	46,5	6	64	0,12
1/2"	15	20	80	5940040000	15	15	62	33	25	95	50	16,3	64	0,20
3/4"	20	10	40	5940050000	20	16,3	69	39	31	110	62	29,5	50	0,33
1"	25	10	20	5940060000	25	19,1	83	49	38	110	66	43	50	0,51
1"1/4	32	6	12	5940070000	32	21,4	96	59	48	160	79	89	50	0,84
1"1/2	40	4	8	5940080000	40	21,4	108	73	54	160	85,5	230	40	1,24
2"	50	2	4	5940100000	50	25,7	127,5	86	67	170	103	265	40	1,96
2"1/2	65	2	4	5940120000	65	30,2	152	111	90	205	129	540	25	3,65
3"	80	-	4	5940140000	80	33,3	177	136	105	205	140	873	25	5,87
4"	100	-	2	5940180000	100	39,3	214	166	130	260	160	1390	25	10,49

Temperature range: -20°C +160°C.

Aplicaciones



DRINKING
WATER



HEATING



HVAC



COMPRESSED
AIR



INDUSTRIAL



MARINE