


2320



Válvula esfera paso total con roscas hembra/hembra y mariposa de aluminio agujero de compensación/enjuague.

Especificaciones técnicas

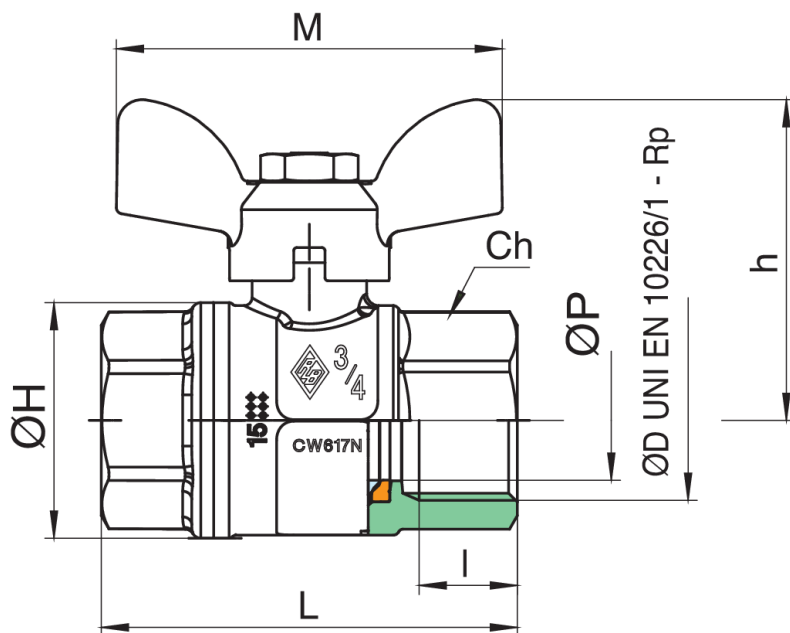

| TAMAÑO | DN | BOX | MASTER BOX | CÓDIGO | ØP | I | L | ØH | CH | M | H | KV | PN | KG |
|--------|----|-----|------------|------------|----|------|------|----|----|----|------|------|----|------|
| 1/4" | 8 | 20 | 80 | 1720020000 | 10 | 11 | 51,5 | 23 | 20 | 50 | 37,5 | 5,4 | 64 | 0,14 |
| 3/8" | 10 | 20 | 80 | 1720030000 | 10 | 11,4 | 51,5 | 23 | 20 | 50 | 37,5 | 6 | 64 | 0,12 |
| 1/2" | 15 | 20 | 80 | 2320040000 | 15 | 15 | 62 | 33 | 27 | 50 | 41,5 | 16,3 | 64 | 0,24 |
| 3/4" | 20 | 10 | 40 | 2320050000 | 20 | 16,3 | 69 | 39 | 32 | 64 | 53 | 29,5 | 64 | 0,36 |
| 1" | 25 | 10 | 20 | 2320060000 | 25 | 19,1 | 83 | 49 | 38 | 64 | 57 | 43 | 64 | 0,55 |

Temperature range: -20°C +160°C.

*Art. [1720](#)

Aplicaciones



DRINKING
WATER



HEATING



HVAC



COMPRESSED
AIR



INDUSTRIAL



MARINE