



## 4582

Robinet à boisseau sphérique, taraudée femelle, avec écrou de raccord, papillon en aluminium.

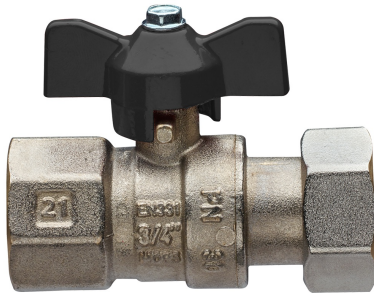

**NEW**

### Spécifications techniques

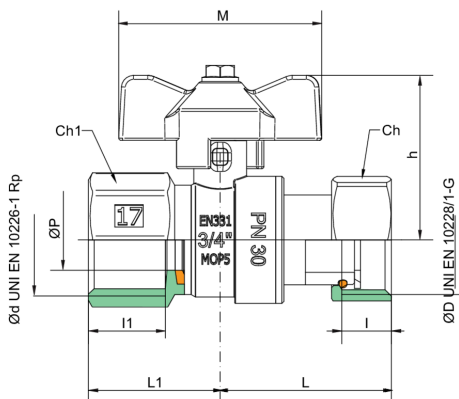

ØP	I	I1	L	L1	H	CH	CH1	M	PN	KG
10	11	17	41	29	41	25	24	50	30	0,20
20	13	22	48	39	46	38	37	50	30	0,39
15	12	19	42	33	43	31	30	50	30	0,28
15	12	19	42	33	43	31	30	50	30	0,24

Temperature range: -10°C +120°C.

### Applications



DRINKING  
WATER



HEATING



HVAC



COMPRESSED  
AIR



INDUSTRIAL



MARINE