



1521



Robinet à boisseau sphérique à passage total taraudée M/F, avec poignée à papillon en aluminium.

Spécifications techniques

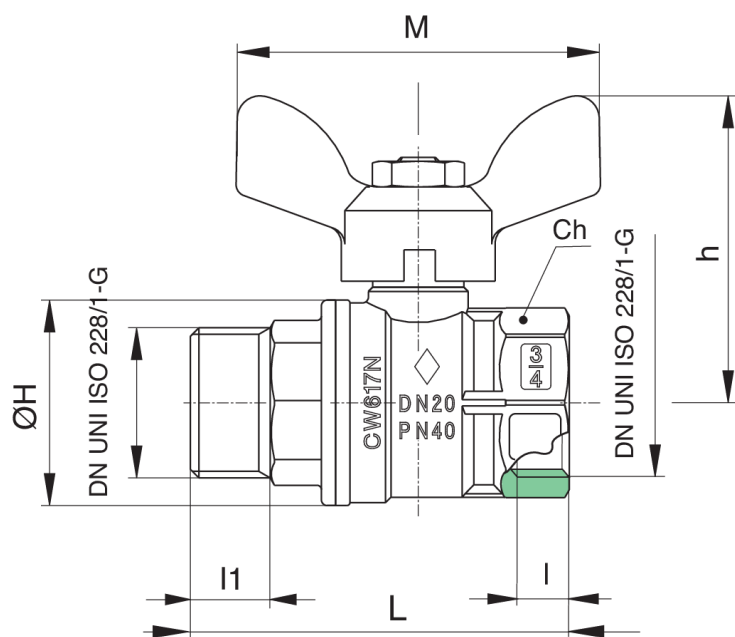

| TAILLE | DN | BOX | MASTER BOX | CODE | I | I1 | L | ØH | CH | M | H | KV | PN | KG |
|--------|----|-----|------------|------------|------|------|------|------|----|----|------|------|----|------|
| 1/4" | 8 | 20 | 80 | 1721020000 | 11 | 11 | 59 | 23 | 20 | 50 | 37,5 | 5,4 | 64 | 0,13 |
| 3/8" | 10 | 20 | 80 | 1721030000 | 11,4 | 11,4 | 59,5 | 23 | 20 | 50 | 37,5 | 6 | 64 | 0,13 |
| 1/2" | 15 | 20 | 80 | 1521040000 | 12 | 13 | 59 | 30 | 25 | 50 | 39,5 | 15,7 | 50 | 0,16 |
| 3/4" | 20 | 10 | 40 | 1521050000 | 12 | 14 | 66,5 | 36 | 31 | 64 | 50,5 | 28 | 40 | 0,26 |
| 1" | 25 | 10 | 20 | 1521060000 | 14,5 | 15 | 77,5 | 43,5 | 38 | 64 | 53 | 41,5 | 40 | 0,41 |

Temperature range: -20°C +160°C.

*Art. [1721](#)

Applications



DRINKING WATER



HEATING



HVAC



COMPRESSED AIR



INDUSTRIAL



MARINE