


1620

Robinet à boisseau sphérique à passage total, taraudée F/F, avec poignée à papillon en aluminium.



Spécifications techniques

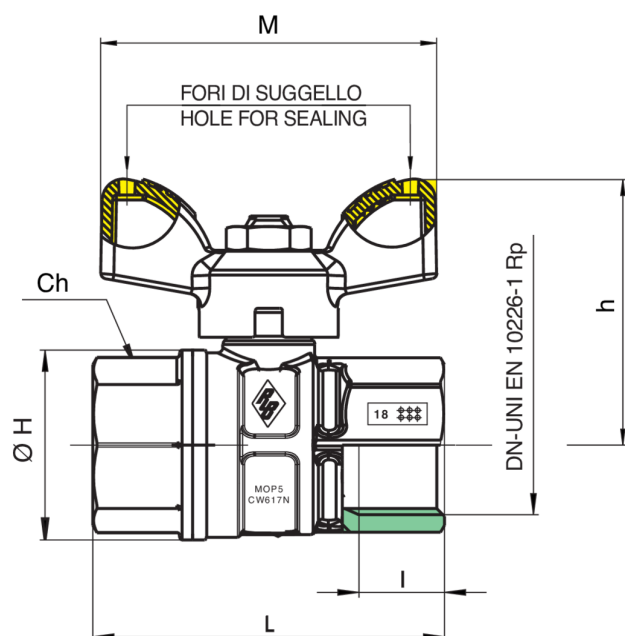

TAILLE	DN	BOX	MASTER BOX	CODE	I	L	ØH	CH	M	H	KV	PN	KG
1/4**	8	20	80	1720020000	11	51,5	23	20	50	37,5	5,4	64	0,14
3/8**	10	20	80	1720030000	11,4	51,5	23	20	50	37,5	6	64	0,12
1/2"	15	20	80	1620040000	15	59	30	25	50	41	16,3	50	0,17
3/4"	20	10	40	1620050000	16,3	67	36	31	64	51	29,5	40	0,27
1"	25	10	20	1620060000	19,1	81,5	43,5	38	64	53	43	40	0,43

Temperature range: -20°C +160°C.

*Art. [1720](#)

Applications



DRINKING
WATER



HEATING



HVAC



COMPRESSED
AIR



INDUSTRIAL



MARINE