


**1620**

Robinet à boisseau sphérique à passage total, taraudée F/F, avec poignée à papillon en aluminium.



Spécifications techniques

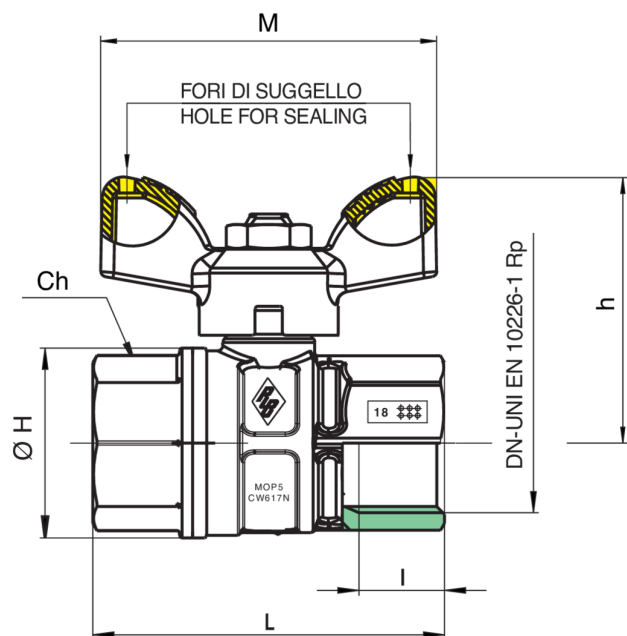

| TAILLE | DN | BOX | MASTER BOX | CODE       | I    | L    | ØH   | CH | M  | H    | KV   | PN | KG   |
|--------|----|-----|------------|------------|------|------|------|----|----|------|------|----|------|
| 1/4**  | 8  | 20  | 80         | 1720020000 | 11   | 51,5 | 23   | 20 | 50 | 37,5 | 5,4  | 64 | 0,14 |
| 3/8**  | 10 | 20  | 80         | 1720030000 | 11,4 | 51,5 | 23   | 20 | 50 | 37,5 | 6    | 64 | 0,12 |
| 1/2"   | 15 | 20  | 80         | 1620040000 | 15   | 59   | 30   | 25 | 50 | 41   | 16,3 | 50 | 0,17 |
| 3/4"   | 20 | 10  | 40         | 1620050000 | 16,3 | 67   | 36   | 31 | 64 | 51   | 29,5 | 40 | 0,27 |
| 1"     | 25 | 10  | 20         | 1620060000 | 19,1 | 81,5 | 43,5 | 38 | 64 | 53   | 43   | 40 | 0,43 |

Temperature range: -20°C +160°C.

\*Art. [1720](#)

## Applications



DRINKING  
WATER



HEATING



HVAC



COMPRESSED  
AIR



INDUSTRIAL



MARINE