



## 1710

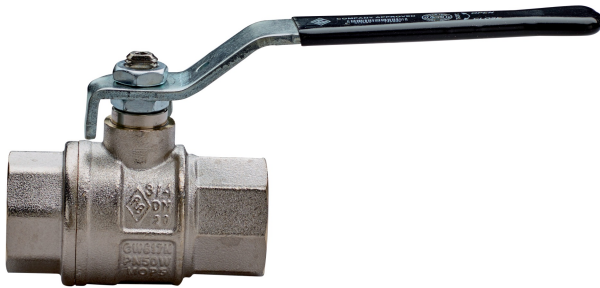

Robinet à boisseau sphérique à passage total, taraudée F/F, avec poignée en acier.

### Spécifications techniques

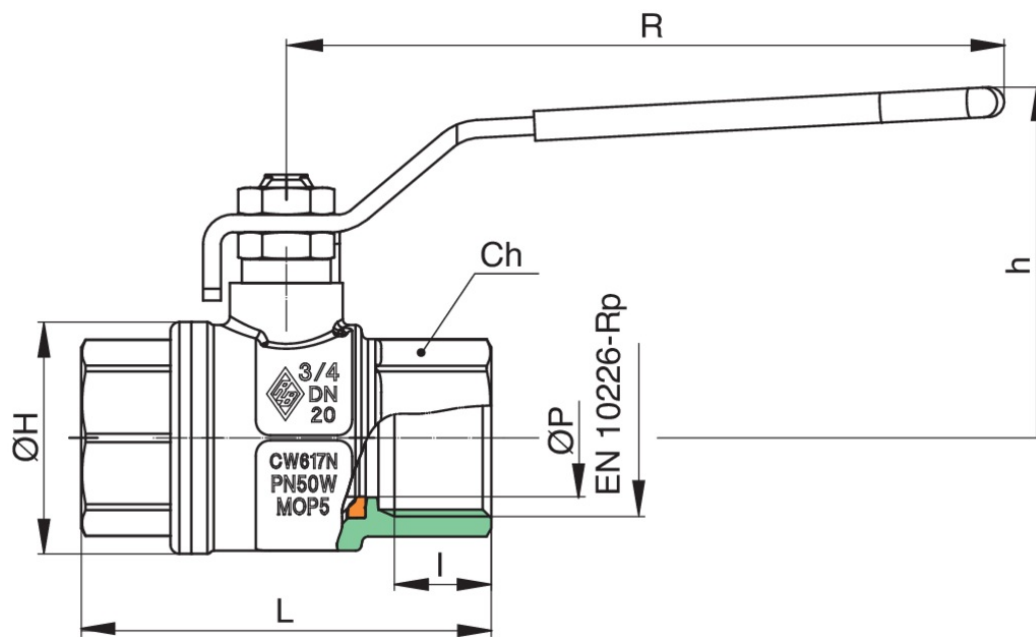

TAILLE	DN	BOX	MASTER BOX	CODE	ØP	I	L	ØH	CH	R	H	KV	PN	KG
1/4"	8	20	80	1710020000	10	11	51,5	23	20	95	43	5,4	64	0,15
3/8"	10	20	80	1710030000	10	11,4	51,5	23	20	95	43	6	64	0,14
1/2"	15	20	80	1710040000	15	15	62	33	25	95	47	16,3	64	0,21
3/4"	20	10	40	1710050000	20	16,3	69	39	31	120	59	29,5	50	0,36
1"	25	10	20	1710060000	25	19,1	83	49	38	120	63	43	50	0,53
1 1/4"	32	6	12	1710070000	32	21,4	96	59	48	150	76	89	50	0,89
1 1/2"	40	4	8	1710080000	40	21,4	108	73	54	150	82	230	40	1,29
2"	50	2	4	1710100000	50	25,7	127,5	86	67	160	95	265	40	2,00
2 1/2"	65	2	4	1710120000	65	30,2	152	111	90	205	122	540	25	3,73
3"	80	0	4	1710140000	80	33,3	177	136	105	205	133	873	25	5,95
4"	100	0	2	1710180000	100	39,3	214	166	130	260	166	1390	25	10,57

Temperature range: -20°C +160°C.

# Applications



DRINKING WATER



HEATING



HVAC



COMPRESSED AIR



INDUSTRIAL



MARINE