




1711

Robinet à boisseau sphérique à passage total, taraudée M/F, avec poignée en acier.

Spécifications techniques

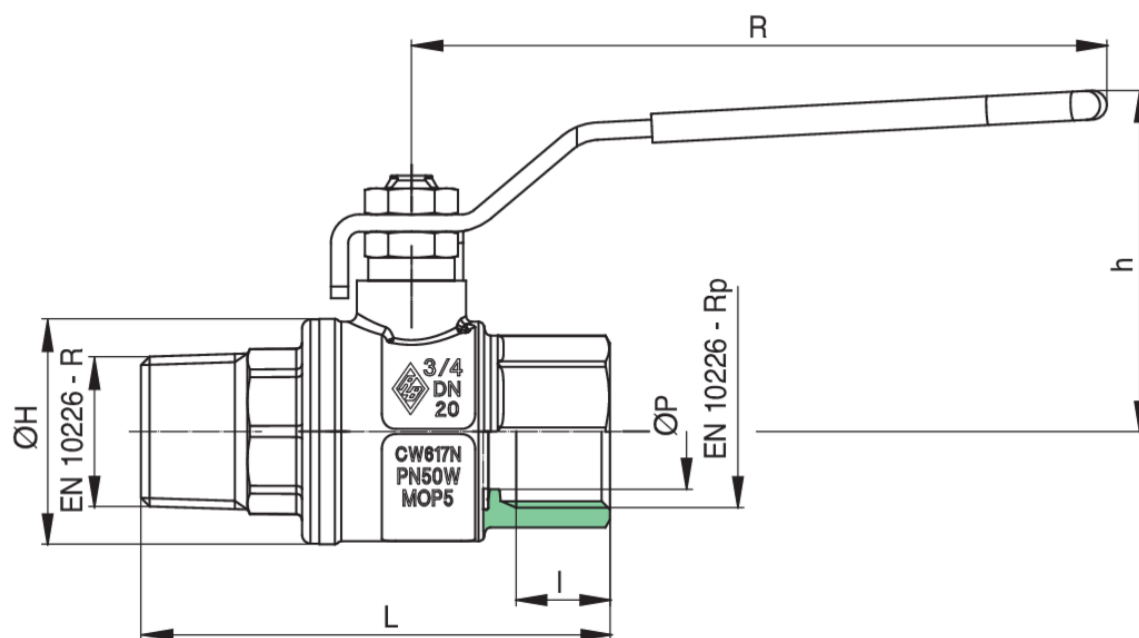

| TAILLE | DN | BOX | MASTER BOX | CODE | ØP | I | L | ØH | CH | R | H | KV | PN | KG |
|--------|-----|-----|------------|------------|-----|------|-------|-----|-----|-----|-----|------|----|-------|
| 1/4" | 8 | 20 | 80 | 1711020000 | 10 | 11 | 59 | 23 | 20 | 95 | 43 | 5,4 | 64 | 0,15 |
| 3/8" | 10 | 20 | 80 | 1711030000 | 10 | 11,4 | 59,5 | 23 | 20 | 95 | 43 | 6 | 64 | 0,15 |
| 1/2" | 15 | 20 | 80 | 1711040000 | 15 | 15 | 72,5 | 33 | 25 | 95 | 47 | 16,3 | 64 | 0,23 |
| 3/4" | 20 | 10 | 40 | 1711050000 | 20 | 16,3 | 81,5 | 39 | 31 | 120 | 59 | 29,5 | 50 | 0,39 |
| 1" | 25 | 10 | 20 | 1711060000 | 25 | 19,1 | 94,5 | 49 | 38 | 120 | 63 | 43 | 50 | 0,57 |
| 1 1/4" | 32 | 6 | 12 | 1711070000 | 32 | 21,4 | 111 | 59 | 48 | 150 | 76 | 89 | 50 | 0,97 |
| 1 1/2" | 40 | 4 | 8 | 1711080000 | 40 | 21,4 | 119 | 73 | 54 | 150 | 82 | 230 | 40 | 1,33 |
| 2" | 50 | 2 | 4 | 1711100000 | 50 | 25,7 | 141,5 | 86 | 67 | 160 | 95 | 265 | 40 | 2,06 |
| 2 1/2" | 65 | 2 | 4 | 1711120000 | 65 | 30,2 | 175 | 111 | 90 | 205 | 122 | 540 | 25 | 4,14 |
| 3" | 80 | - | 4 | 1711140000 | 80 | 33,3 | 203,5 | 136 | 105 | 205 | 133 | 873 | 25 | 6,36 |
| 4" | 100 | - | 2 | 1711180000 | 100 | 39,3 | 250 | 166 | 130 | 260 | 166 | 1390 | 25 | 11,88 |

Temperature range: -20°C +160°C.

Applications



DRINKING WATER



HEATING



HVAC



COMPRESSED AIR



INDUSTRIAL



MARINE