


## 2320



Robinet à boisseau sphérique à passage total, taraudée F/F, avec poignée à papillon en aluminium et trou de compensation/rinçage.

### Spécifications techniques

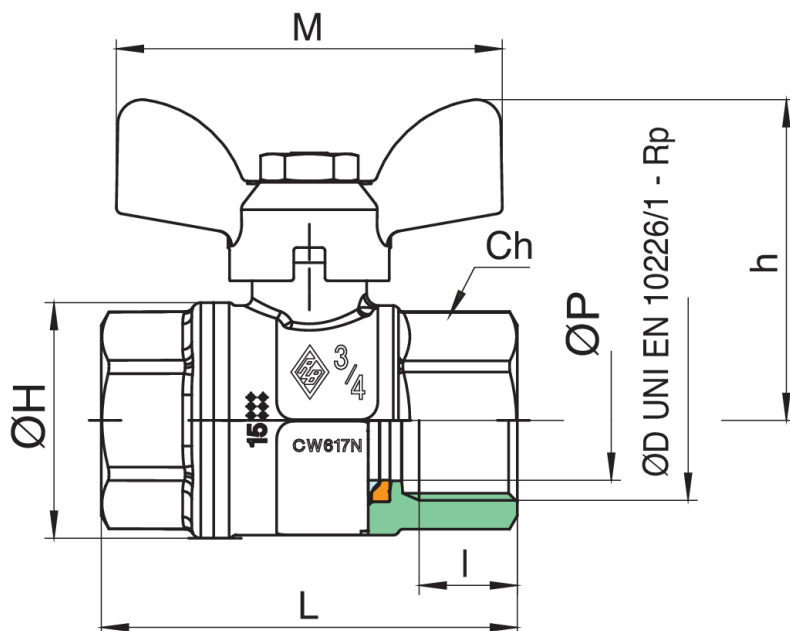

TAILLE	DN	BOX	MASTER BOX	CODE	ØP	I	L	ØH	CH	M	H	KV	PN	KG
1/4**	8	20	80	1720020000	10	11	51,5	23	20	50	37,5	5,4	64	0,14
3/8**	10	20	80	1720030000	10	11,4	51,5	23	20	50	37,5	6	64	0,12
1/2"	15	20	80	2320040000	15	15	62	33	27	50	41,5	16,3	64	0,24
3/4"	20	10	40	2320050000	20	16,3	69	39	32	64	53	29,5	64	0,36
1"	25	10	20	2320060000	25	19,1	83	49	38	64	57	43	64	0,55

Temperature range: -20°C +160°C.

\*Art. [1720](#)

## Applications



DRINKING  
WATER



HEATING



HVAC



COMPRESSED  
AIR



INDUSTRIAL



MARINE