


4589



Robinet à boisseau sphérique, à équerre, taraudée mâle avec écrou et poignée à papillon en aluminium.

Spécifications techniques

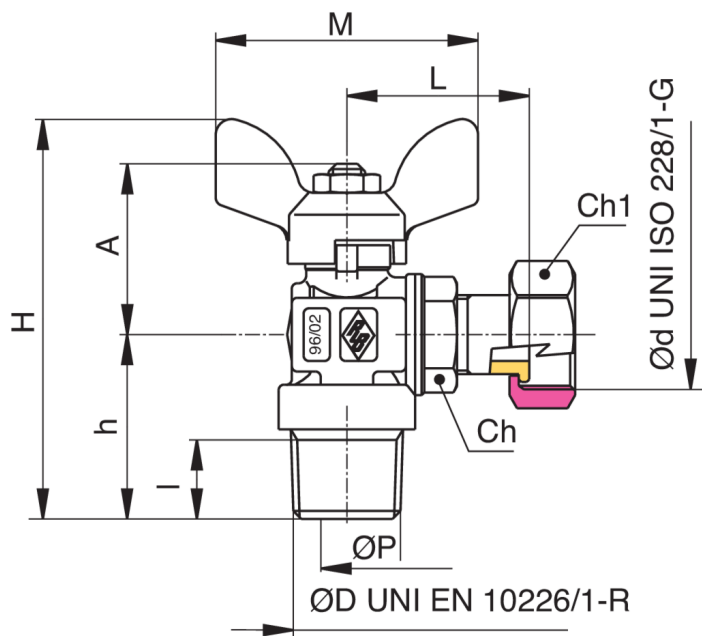

| ØD X ØD | DN | BOX | MASTER BOX | CODE | ØP | I | CH | CH1 | H | L | H | M | PN | KG |
|-------------|----|-----|------------|------------|----|------|----|-----|----|----|----|----|----|------|
| 1/2" x 1/2" | 15 | 20 | 80 | 4589250000 | 8 | 17 | 20 | 24 | 75 | 35 | 35 | 50 | 30 | 0,18 |
| 1/2" x 3/4" | 15 | 10 | 40 | 4589260000 | 8 | 17 | 20 | 30 | 75 | 35 | 35 | 50 | 30 | 0,21 |
| 3/4" x 3/4" | 20 | 10 | 40 | 4589270000 | 10 | 19,5 | 27 | 30 | 84 | 45 | 38 | 50 | 30 | 0,32 |

Temperature range: -15°C +120°C.

Applications



DRINKING WATER



HEATING



HVAC



COMPRESSED AIR



INDUSTRIAL



MARINE