


**9894**

Vanne lourde en bronze, PN16.



## Spécifications techniques

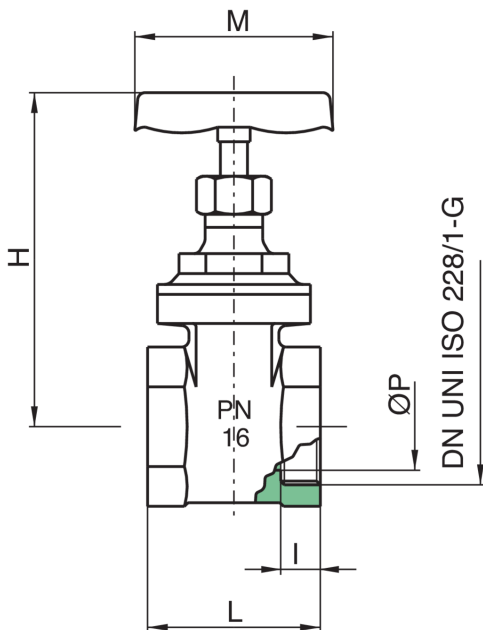

| TAILLE | DN  | BOX | MASTER BOX | CODE       | ØP | L  | H   | M   | I  | KV    | PN | KG   |
|--------|-----|-----|------------|------------|----|----|-----|-----|----|-------|----|------|
| 1/2"   | 15  | 15  | 60         | 9894040000 | 15 | 38 | 60  | 45  | 9  | 8,5   | 16 | 0,20 |
| 3/4"   | 20  | 10  | 40         | 9894050000 | 19 | 45 | 78  | 50  | 10 | 17    | 16 | 0,29 |
| 1"     | 25  | 10  | 40         | 9894060000 | 24 | 48 | 92  | 55  | 11 | 27    | 16 | 0,37 |
| 1"1/4  | 32  | 6   | 24         | 9894070000 | 32 | 51 | 108 | 60  | 11 | 50    | 16 | 0,57 |
| 1"1/2  | 40  | 4   | 16         | 9894080000 | 37 | 58 | 125 | 70  | 13 | 82,5  | 16 | 0,82 |
| 2"     | 50  | 4   | 8          | 9894100000 | 47 | 62 | 145 | 80  | 13 | 136,5 | 16 | 1,21 |
| 2"1/2  | 65  | 2   | 4          | 9894120000 | 60 | 78 | 175 | 100 | 16 | 240   | 16 | 2,09 |
| 3"     | 80  | 2   | 4          | 9894140000 | 72 | 80 | 200 | 100 | 16 | 340   | 16 | 2,69 |
| 4"     | 100 | -   | 3          | 9894180000 | 93 | 98 | 240 | 120 | 19 | 550   | 16 | 4,80 |

Temperature range: -10°C +100°C in absence of steam.

## Applications



DRINKING  
WATER



HEATING



HVAC



COMPRESSED  
AIR



INDUSTRIAL



MARINE