


Robinet à boisseau sphérique à passage total pour gaz, taraudée M/F avec dispositif de sécurité pour colonne montante gaz avec capuchon de protection.



## Spécifications techniques

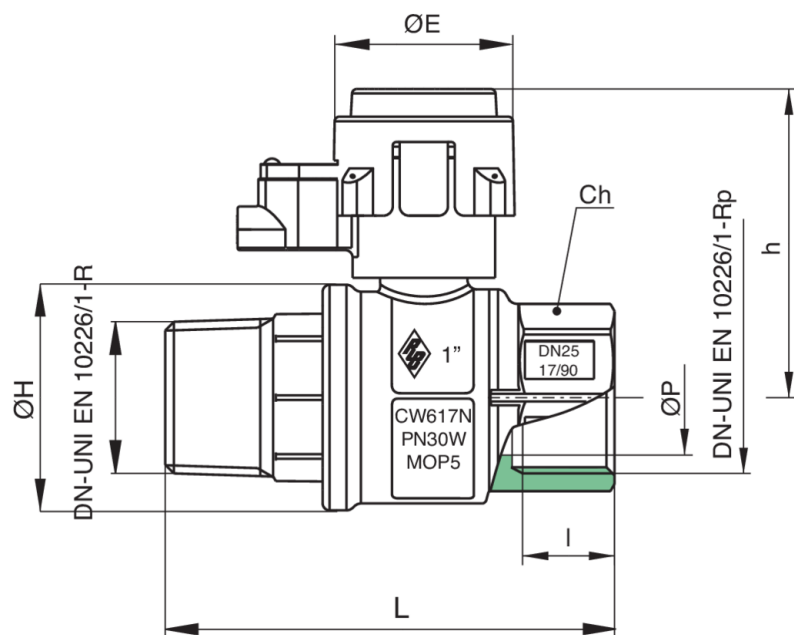

| TAILLE | DN | BOX | MASTER BOX | CODE       | ØP | ØE | I    | CH | ØH | L    | H  | MOP | KG   |
|--------|----|-----|------------|------------|----|----|------|----|----|------|----|-----|------|
| 1"     | 25 | 10  | 20         | 9701060000 | 25 | 39 | 19,1 | 38 | 49 | 94,5 | 67 | 5   | 0,67 |
| 1"1/4  | 32 | 6   | 12         | 9701070000 | 32 | 39 | 21,4 | 48 | 59 | 111  | 83 | 5   | 1,07 |
| 1"1/2  | 40 | 4   | 8          | 9701080000 | 40 | 39 | 21,4 | 54 | 73 | 119  | 89 | 5   | 1,58 |
| 2"     | 50 | 2   | 4          | 9701100000 | 50 | 39 | 25,7 | 67 | 87 | 141  | 99 | 5   | 2,18 |

Temperature range: -20°C +60°C.

## Applications



GAS