


Robinet à boisseau sphérique pour colonne montante gaz avec capuchon plombable, passage réduit taraudage femelle et connexion PE, raccord pour tuyau de protection en acier.



Spécifications techniques

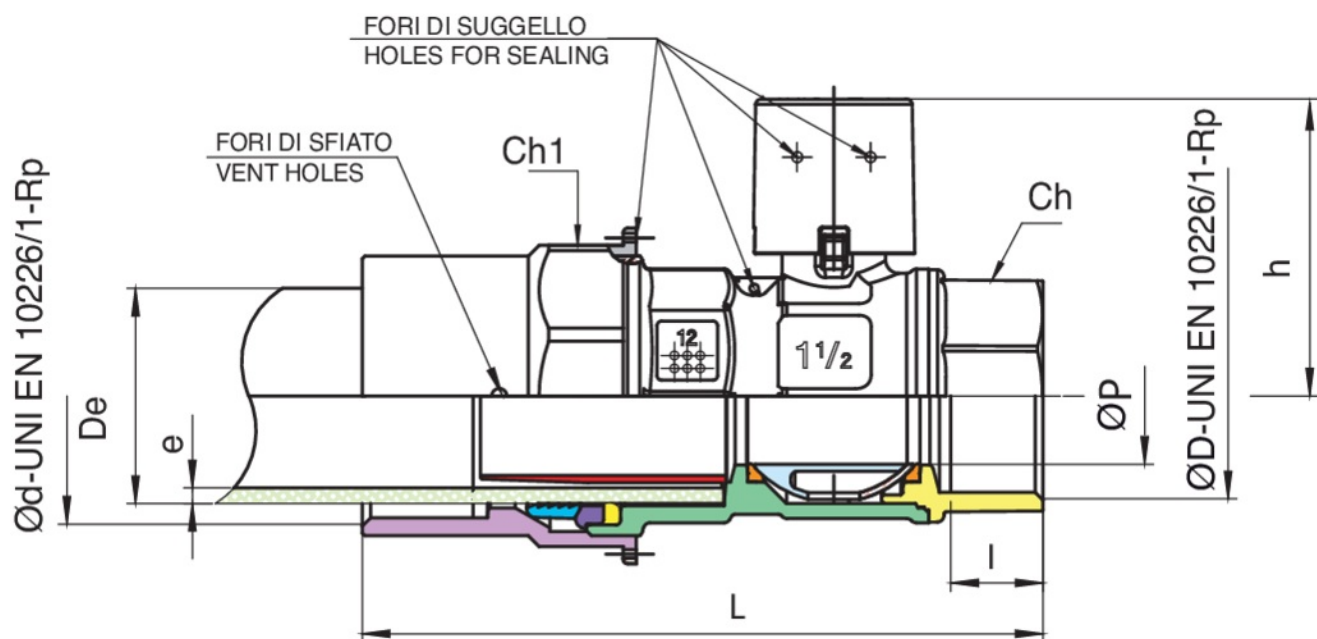

ØD X DE	DN	ØD UNI EN 10226-1 RP	BOX	MASTER BOX	CODE	ØP	I	CH	CH1	L	E	H	MOP	KG
1"x32	25	1"1/4	10	20	6594060032	20	19,1	38	50	126	3	54,5	5	0,69
1"1/2x50	40	2"	6	12	6594080050	32	21,4	54	70	158	4,6	69	5	1,47
2"x63	50	2"1/2	2	4	6594100063	40	25,7	67	85	187	5,8	75	5	2,38

Temperature range: -20°C +60°C.

Applications



GAS