


## 9F40



Traversa in acciaio, interasse 110 mm con cannotto in ottone e presa pressione, filettatura EN 10226-1, senza zanca.



### Specifiche tecniche

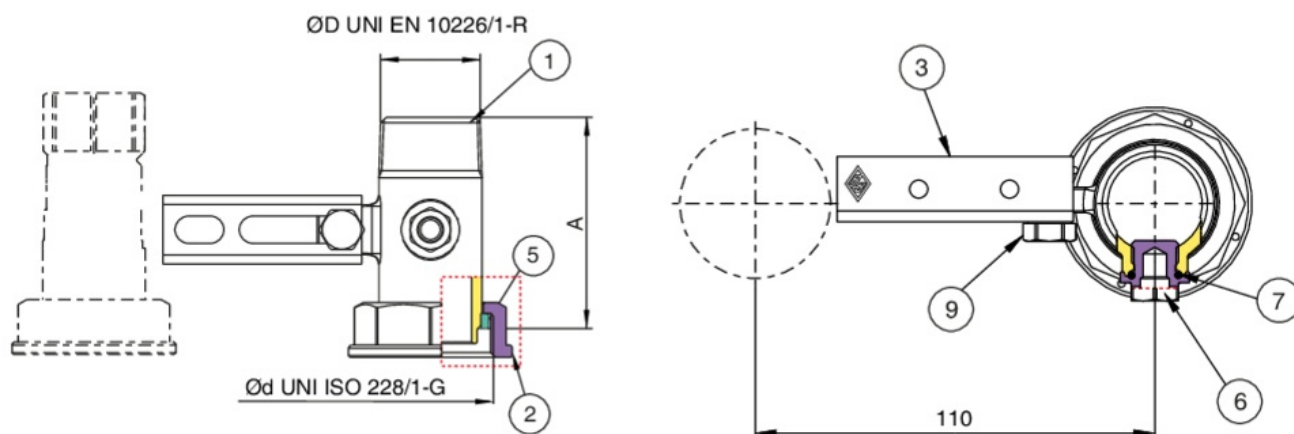

POSIZIONE	NOME PARTE	MATERIALE	TRATTAMENTO	N.° PEZZI
1	CANNOTTO	BRASS CW617N UNI EN 12165	SAND BLASTING	1
2	GIRELLO	BRASS CW617N UNI EN 12165	ZINC TROPICALIZED	1
3	TRAVERSA	STEEL S235JR UNI EN 10025	ZINC TROPICALIZED	1
4	ZANCA	STEEL S235JR UNI EN 10025	ZINC TROPICALIZED	1
5	GHIERA	BRASS CW614 UNI EN 12164	SAND BLASTING	1
6	TAPPO	BRASS CW614 UNI EN 12164	SAND BLASTING	1
7	O-RING	NBR	-	1
8	DADO	STEEL	ZINC COATING	1
9	VITE	STEEL	ZINC COATING	2
10	CANNOTTO	STEEL S235JR UNI EN 10025	ZINC TROPICALIZED	1
11	ANELLO ELASTICO	STAINLESS STEEL AISI 302	SOLUBILIZATION	1
12	TUBO FLESSIBILE	STAINLESS STEEL AISI 316L	SOLUBILIZATION	1

ØD X ØD	MASTER BOX	CODICE	A
1" x 1"1/4	25	9F40290000	69,5

## Applicazioni



GAS