



5940

Valvola a sfera passaggio totale F/F per ossigeno, senza lubrificante.

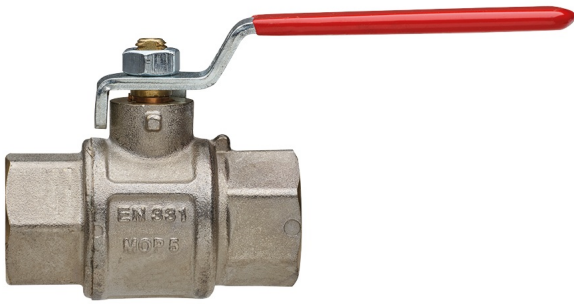

NEW

## Specifiche tecniche

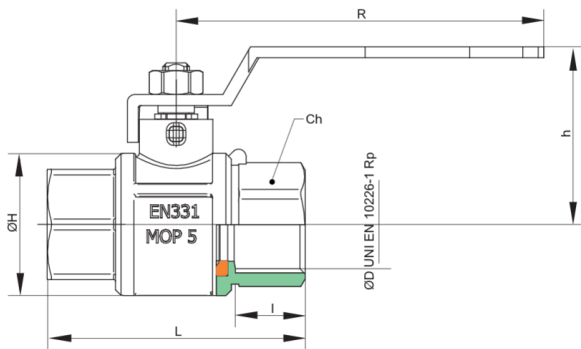

ØP	I	L	ØH	CH	R	H	KV	PN	KG
10	12	50	28	21	100	44	9,4	63	0,13
12	12	50,3	28	21	100	44	17	63	0,21
15	17	61	32	25	100	46	39,2	50	0,22
20	19	70	39	30	100	49	62	50	0,33
25	21	81	47,5	37	100	52,5	85,2	45	0,51
32	24	94	58	48	158	74,5	121	30	0,82
40	26	105	70	54	158	81	292	25	1,26
50	29	126	85	66	158	89	397	20	2,14

Limiti di temperatura: -10°C +60°C.

## Applicazioni



DRINKING  
WATER



HEATING



HVAC



COMPRESSED  
AIR



INDUSTRIAL



MARINE