



## 5945

Raccordo diritto a saldare per ossigeno, con guarnizione.



**NEW**

### Specifiche tecniche

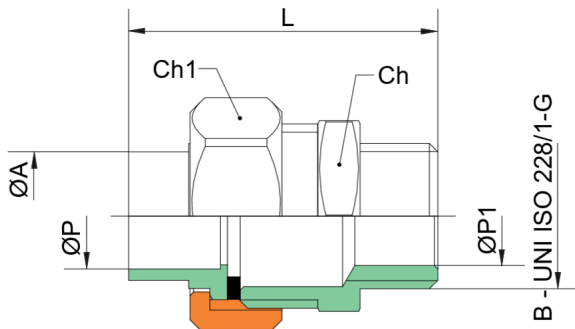

| ØP | ØP1 | L  | CH | CH1 | PN | KG    |
|----|-----|----|----|-----|----|-------|
| 10 | 10  | 39 | 21 | 25  | 63 | 0,065 |
| 10 | 10  | 44 | 27 | 30  | 50 | 0,103 |
| 10 | 10  | 45 | 27 | 30  | 50 | 0,095 |
| 13 | 13  | 45 | 27 | 30  | 50 | 0,101 |
| 14 | 14  | 45 | 27 | 30  | 50 | 0,102 |
| 20 | 20  | 62 | 42 | 46  | 45 | 0,264 |
| 25 | 25  | 62 | 42 | 46  | 45 | 0,256 |
| 8  | 8   | 39 | 21 | 25  | 63 | 0,065 |
| 16 | 16  | 55 | 34 | 37  | 50 | 0,166 |
| 20 | 20  | 55 | 34 | 37  | 50 | 0,165 |

Limiti di temperatura: -10°C +110°C.

### Applicazioni



DRINKING  
WATER



HEATING



HVAC



COMPRESSED  
AIR



INDUSTRIAL



MARINE

