


571100

Raccordo curvo femmina con anello d'arresto in ottone.

NEW

Specifiche tecniche

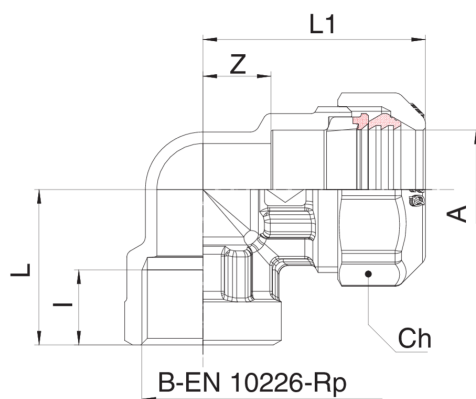

B-EN 10226-Rp

| A X B | BOX | MASTER BOX | CODICE | I | CH | L | L1 | Z |
|--------------------------|-----|------------|-------------|------|----|------|-------|------|
| 20 x 1/2" | 20 | 80 | 5711002004 | 15 | 34 | 42,5 | 33,5 | 12 |
| 25 x 3/4" | 15 | 60 | 5711002505 | 16,3 | 41 | 51 | 39,25 | 17,5 |
| 32 x 3/4" | 10 | 40 | 5711003205 | 16,3 | 51 | 58 | 44 | 18 |
| 32 x 1" | 10 | 40 | 5711003206 | 19,1 | 51 | 58 | 47 | 18 |
| 40 x 1 1/4" | 4 | 16 | 5711004007 | 21,4 | 59 | 73,5 | 56,5 | 23 |
| 50 x 1 1/2" | 2 | 8 | 5711005008 | 21,4 | 70 | 84,5 | 62,5 | 28,5 |
| 63 x 2" | 5 | 10 | 5711006310 | 25,7 | 87 | 100 | 76 | 36 |
| 75 x 2 1/2" ¹ | 2 | 4 | 5711007512 | 30 | - | 113 | 75 | 38 |
| 90 x 3" ¹ | 1 | 2 | 5711009014 | 33 | - | 130 | 85 | 40 |
| 110 x 4" ¹ | - | 1 | 57110011018 | 36 | - | 157 | 100 | 42 |

¹ Con flangia.

Applicazioni

