



## 1530

Valvola a sfera a passaggio totale, filettatura F/F, con farfalla prolungata, in poliammide, anticondensa e antigoccia.

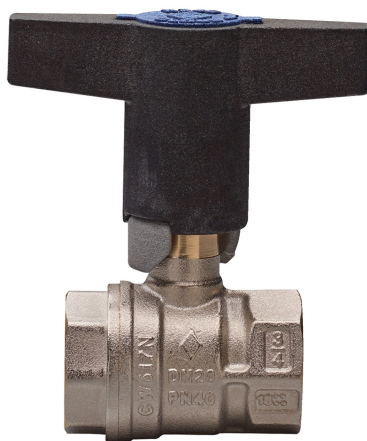

### Specifiche tecniche

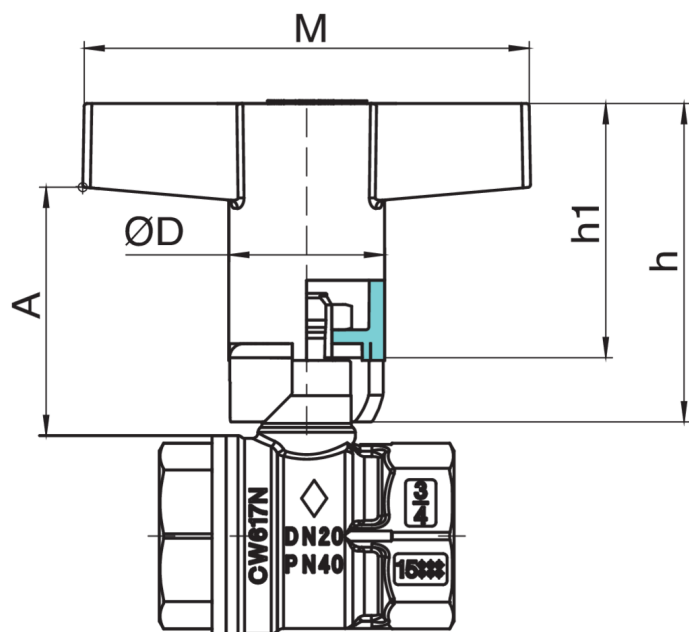

| MISURA | DN | BOX | MASTER BOX | CODICE     | ØD | H    | H1   | M   | A    | PN | KG   |
|--------|----|-----|------------|------------|----|------|------|-----|------|----|------|
| 1/2"   | 15 | 25  | 50         | 1530040000 | 28 | 55   | 45,5 | 80  | 41   | 50 | 0,14 |
| 3/4"   | 20 | 20  | 40         | 1530050000 | 28 | 57   | 45,5 | 80  | 45   | 40 | 0,24 |
| 1"     | 25 | 15  | 30         | 1530060000 | 28 | 57   | 45,5 | 80  | 43,5 | 40 | 0,37 |
| 1"1/4  | 32 | 6   | 12         | 1530070000 | 38 | 82,3 | 67,5 | 120 | 64   | 40 | 0,62 |
| 1"1/2  | 40 | 4   | 8          | 1530080000 | 38 | 82,3 | 67,5 | 120 | 63,5 | 40 | 0,91 |
| 2"     | 50 | 2   | 4          | 1530100000 | 38 | 82,3 | 67,5 | 120 | 66,5 | 40 | 1,55 |

Limiti di temperatura: -20°C +160°C.

## Applicazioni



DRINKING  
WATER



HEATING



HVAC



COMPRESSED  
AIR



INDUSTRIAL



MARINE