



## SUPER-SFER

### 1610

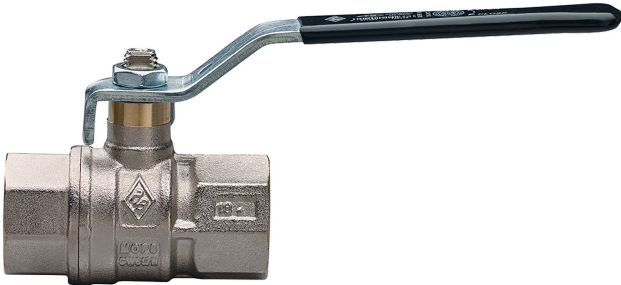

Valvola a sfera a passaggio totale, filettatura F/F, con leva in acciaio.

### Specifiche tecniche

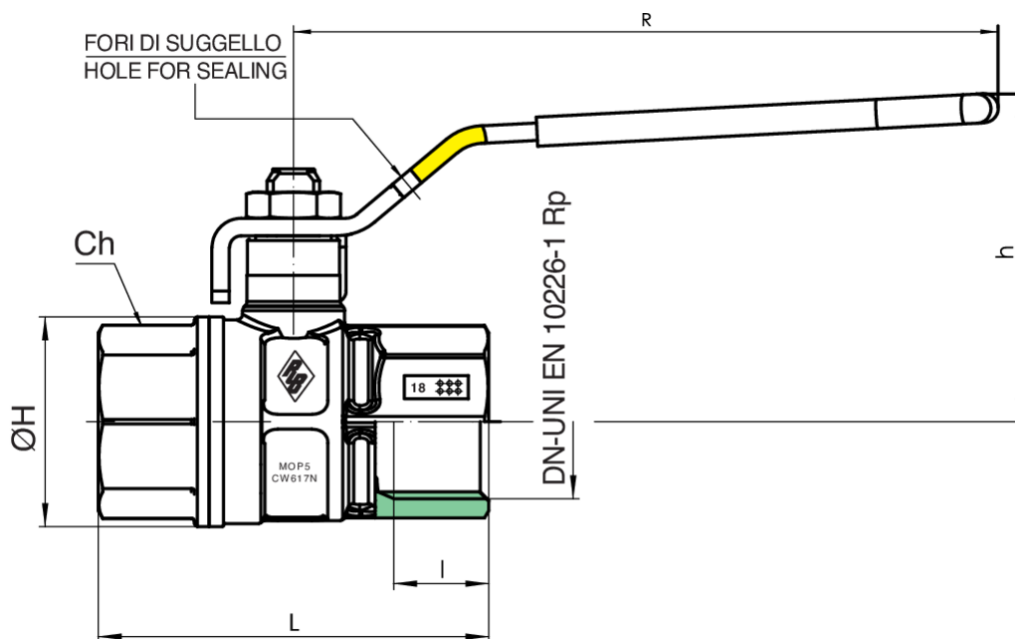

MISURA	DN	BOX	MASTER BOX	CODICE	I	L	ØH	CH	R	H	KV	PN	KG
1/4**	8	20	80	1710020000	11	51,5	23	20	95	43	5,4	64	0,15
3/8**	10	20	80	1710030000	11,4	51,5	23	20	95	43	6	64	0,14
1/2"	15	20	80	1610040000	15	59	30	25	96	45	16,3	50	0,18
3/4"	20	10	40	1610050000	16,3	67	36	31	121	56,5	29,5	40	0,31
1"	25	10	20	1610060000	19,1	81,5	43,5	38	121	59	43	40	0,47
1"1/4	32	6	12	1610070000	21,4	94	53	48	151	72,5	89	40	0,80
1"1/2	40	4	8	1610080000	21,4	102,5	65	54	151	78,5	230	40	1,10
2"	50	2	4	1610100000	25,7	123	80	67	160	91,5	265	40	1,83
2"1/2*	65	2	4	1710120000	30,2	152	111	90	206	123	540	25	3,73
3**	80	0	4	1710140000	33,3	177	136	105	206	133	873	25	5,95
4**	100	0	2	1710180000	39,3	214	166	130	261	165	1390	25	10,57

Limiti di temperatura: -20°C +160°C.

\*Art. [1710](#)

## Applicazioni



DRINKING  
WATER



HEATING



HVAC



COMPRESSED  
AIR



INDUSTRIAL



MARINE