



SUPER-SFER

1610

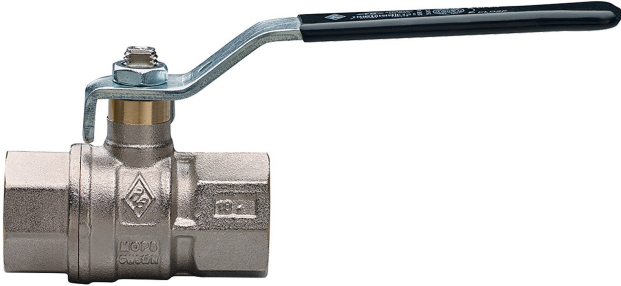

Valvola a sfera a passaggio totale, filettatura F/F, con leva in acciaio.

Specifiche tecniche

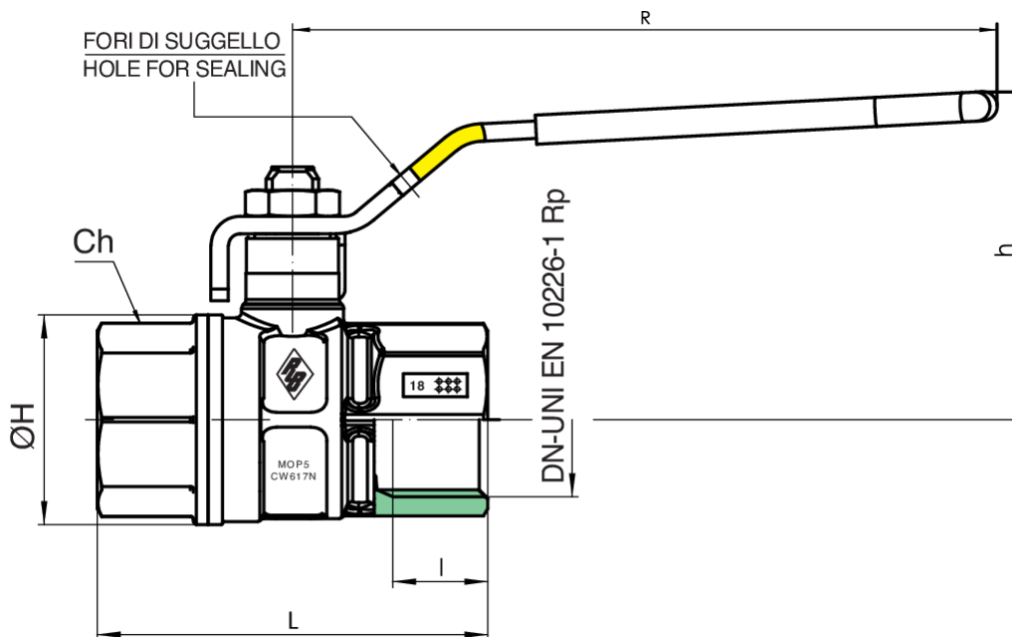

| MISURA | DN | BOX | MASTER BOX | CODICE | I | L | ØH | CH | R | H | KV | PN | KG |
|--------|-----|-----|------------|------------|------|-------|------|-----|-----|------|------|----|-------|
| 1/4** | 8 | 20 | 80 | 1710020000 | 11 | 51,5 | 23 | 20 | 95 | 43 | 5,4 | 64 | 0,15 |
| 3/8** | 10 | 20 | 80 | 1710030000 | 11,4 | 51,5 | 23 | 20 | 95 | 43 | 6 | 64 | 0,14 |
| 1/2" | 15 | 20 | 80 | 1610040000 | 15 | 59 | 30 | 25 | 96 | 45 | 16,3 | 50 | 0,18 |
| 3/4" | 20 | 10 | 40 | 1610050000 | 16,3 | 67 | 36 | 31 | 121 | 56,5 | 29,5 | 40 | 0,31 |
| 1" | 25 | 10 | 20 | 1610060000 | 19,1 | 81,5 | 43,5 | 38 | 121 | 59 | 43 | 40 | 0,47 |
| 1"1/4 | 32 | 6 | 12 | 1610070000 | 21,4 | 94 | 53 | 48 | 151 | 72,5 | 89 | 40 | 0,80 |
| 1"1/2 | 40 | 4 | 8 | 1610080000 | 21,4 | 102,5 | 65 | 54 | 151 | 78,5 | 230 | 40 | 1,10 |
| 2" | 50 | 2 | 4 | 1610100000 | 25,7 | 123 | 80 | 67 | 160 | 91,5 | 265 | 40 | 1,83 |
| 2"1/2* | 65 | 2 | 4 | 1710120000 | 30,2 | 152 | 111 | 90 | 206 | 123 | 540 | 25 | 3,73 |
| 3** | 80 | 0 | 4 | 1710140000 | 33,3 | 177 | 136 | 105 | 206 | 133 | 873 | 25 | 5,95 |
| 4** | 100 | 0 | 2 | 1710180000 | 39,3 | 214 | 166 | 130 | 261 | 165 | 1390 | 25 | 10,57 |

Limiti di temperatura: -20°C +160°C.

*Art. [1710](#)

Applicazioni



DRINKING
WATER



HEATING



HVAC



COMPRESSED
AIR



INDUSTRIAL



MARINE