


1618



Valvola a sfera a passaggio totale, attacco tubo rame, con leva in acciaio.

Specifiche tecniche

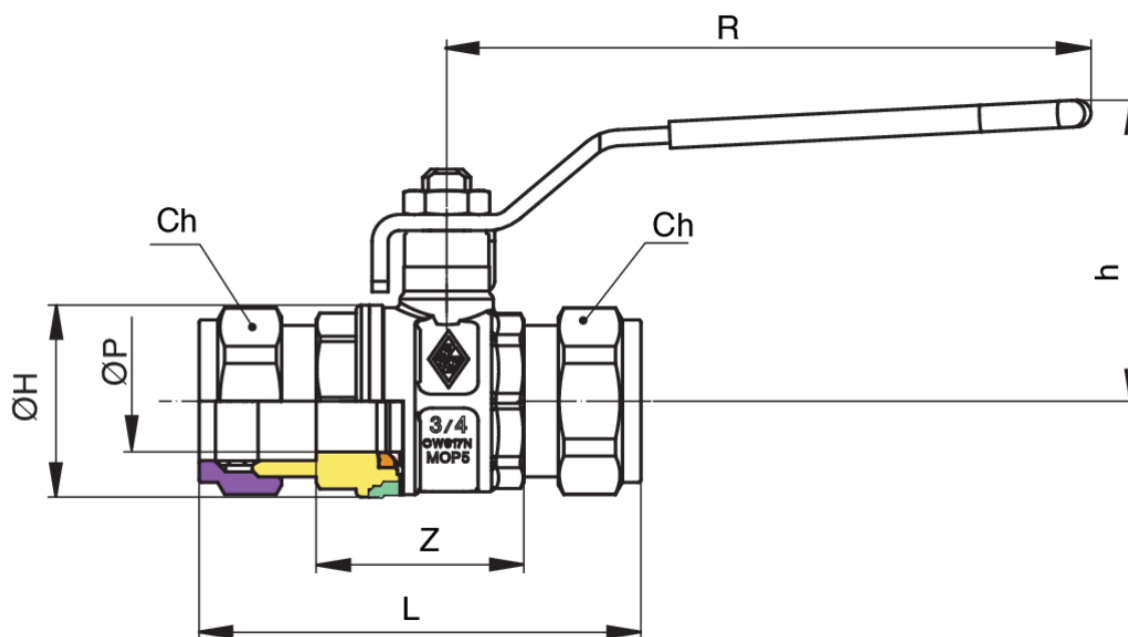

| DN | BOX | MASTER BOX | CODICE | ØP | Z | CH | ØH | L | H | R | KV | PN | KG |
|----|-----|------------|------------|------|-------|----|------|-------|------|-----|------|----|------|
| 15 | 45 | 90 | 1618040000 | 14 | 39 | 24 | 30 | 76 | 45,6 | 96 | 16,3 | 30 | 0,23 |
| 22 | 20 | 40 | 1618050000 | 19 | 39 | 32 | 36 | 84 | 57 | 121 | 29,5 | 30 | 0,38 |
| 28 | 15 | 30 | 1618060000 | 25 | 47,25 | 38 | 43,5 | 93,2 | 59 | 121 | 43 | 30 | 0,54 |
| 35 | 8 | 16 | 1618070000 | 32 | 55,8 | 48 | 53 | 108 | 74 | 151 | 89 | 25 | 0,94 |
| 42 | 6 | 12 | 1618080000 | 40 | 59,7 | 54 | 65 | 132,5 | 79 | 151 | 230 | 25 | 1,33 |
| 54 | 2 | 4 | 1618100000 | 49,5 | 72,1 | 70 | 80 | 153 | 93,5 | 160 | 265 | 25 | 2,28 |

Limiti di temperatura: -20°C +160°C.

Applicazioni



DRINKING WATER



HEATING



HVAC



COMPRESSED AIR



INDUSTRIAL



MARINE