



## SUPER-SFER

### 1630

Valvola a sfera a passaggio totale, filettatura F/F, con farfalla prolungata, in poliammide, anticondensa e antigoccia.

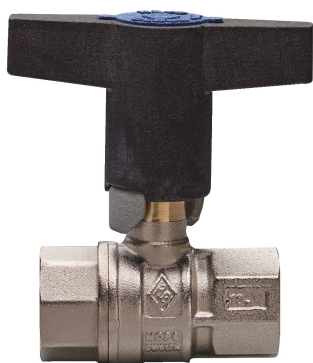

### Specifiche tecniche

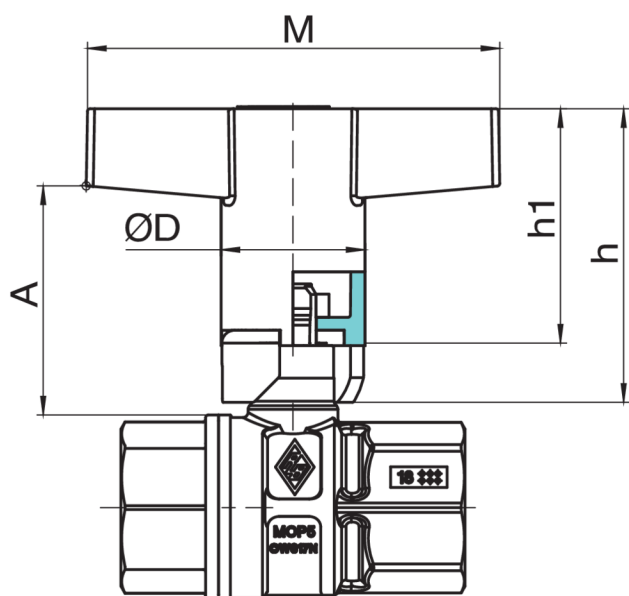

MISURA	DN	BOX	MASTER BOX	CODICE	ØD	H	H1	M	A	PN	KG
1/2"	15	25	50	1630040000	28	55	45,5	80	41	50	0,17
3/4"	20	20	40	1630050000	28	57	45,5	80	45	40	0,28
1"	25	15	30	1630060000	28	57	45,5	80	43,5	40	0,44
1"1/4	32	6	12	1630070000	38	82,3	67,5	120	64	40	0,75
1"1/2	40	4	8	1630080000	38	82,3	67,5	120	63,5	40	1,03
2"	50	2	4	1630100000	38	82,3	67,5	120	66,5	40	1,80

Limiti di temperatura: -20°C +160°C.

## Applicazioni



DRINKING  
WATER



HEATING



HVAC



COMPRESSED  
AIR



INDUSTRIAL



MARINE