



## 1900

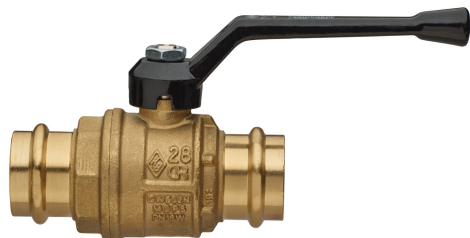

Valvola a sfera a passaggio totale, con attacco pressare/pressare profilo V, leva in alluminio.

### Specifiche tecniche

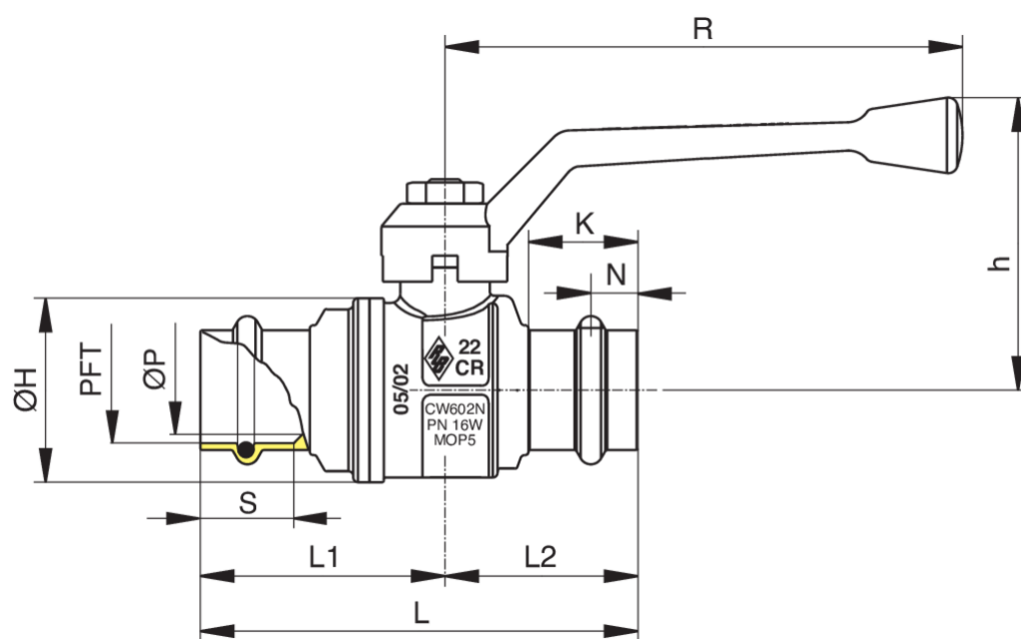

| PFT | DN | BOX | MASTER BOX | CODICE     | ØP   | S  | K    | N    | ØH | L    | L1   | L2   | H    | R   | KV   | PN | KG   |
|-----|----|-----|------------|------------|------|----|------|------|----|------|------|------|------|-----|------|----|------|
| 15  | 15 | 40  | 80         | 1900150000 | 15   | 22 | 21,2 | 10   | 33 | 83,5 | 45,5 | 38   | 49,5 | 95  | 16,3 | 16 | 0,20 |
| 18  | 20 | 25  | 50         | 1900180000 | 20   | 22 | 21,2 | 10   | 39 | 90   | 50   | 40   | 62   | 110 | 16,3 | 16 | 0,31 |
| 22  | 20 | 25  | 50         | 1900220000 | 20   | 23 | 21,5 | 10   | 39 | 89   | 49   | 40   | 62   | 110 | 29,5 | 16 | 0,34 |
| 28  | 25 | 20  | 40         | 1900280000 | 25   | 24 | 21,2 | 10   | 49 | 99,5 | 55,5 | 44   | 66   | 110 | 43   | 16 | 0,49 |
| 35  | 32 | 10  | 20         | 1900350000 | 32   | 26 | 23,2 | 10   | 59 | 112  | 62   | 50   | 79,5 | 160 | 89   | 16 | 0,71 |
| 42  | 40 | 4   | 8          | 1900420000 | 40   | 36 | 28,7 | 12,5 | 73 | 143  | 74   | 69   | 86   | 160 | 230  | 16 | 1,22 |
| 54  | 50 | 2   | 4          | 1900540000 | 49,5 | 40 | 30,2 | 15   | 87 | 166  | 87,2 | 78,8 | 104  | 170 | 265  | 16 | 1,90 |

Limiti di temperatura: -20°C +130°C.

# Applicazioni



DRINKING WATER



HEATING



HVAC



COMPRESSED AIR



INDUSTRIAL



MARINE