


## 4589



Valvola a sfera a squadra, filettatura maschio con girello, farfalla in alluminio.

### Specifiche tecniche

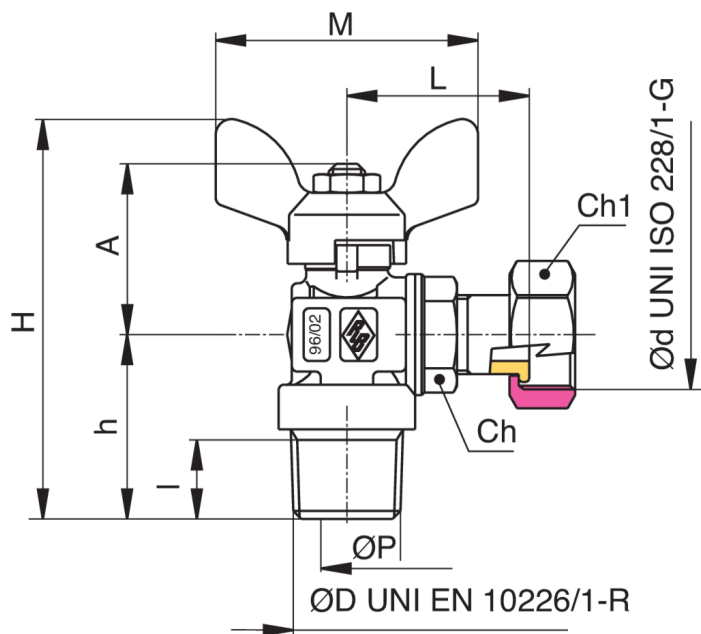

| ØD X ØD     | DN | BOX | MASTER BOX | CODICE     | ØP | I    | CH | CH1 | H  | L  | H  | M  | PN | KG   |
|-------------|----|-----|------------|------------|----|------|----|-----|----|----|----|----|----|------|
| 1/2" x 1/2" | 15 | 20  | 80         | 4589250000 | 8  | 17   | 20 | 24  | 75 | 35 | 35 | 50 | 30 | 0,18 |
| 1/2" x 3/4" | 15 | 10  | 40         | 4589260000 | 8  | 17   | 20 | 30  | 75 | 35 | 35 | 50 | 30 | 0,21 |
| 3/4" x 3/4" | 20 | 10  | 40         | 4589270000 | 10 | 19,5 | 27 | 30  | 84 | 45 | 38 | 50 | 30 | 0,32 |

Limiti di temperatura: -15°C +120°C.

# Applicazioni



DRINKING WATER



HEATING



HVAC



COMPRESSED AIR



INDUSTRIAL



MARINE