


9894

Saracinesca in bronzo pesante, PN16.



Specifiche tecniche

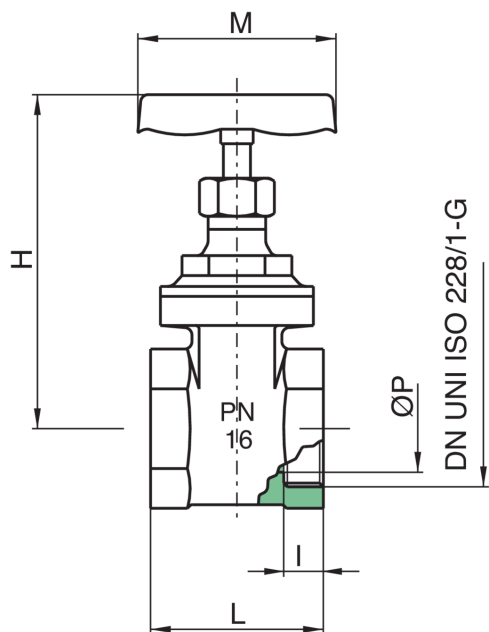

| MISURA | DN | BOX | MASTER BOX | CODICE | ØP | L | H | M | I | KV | PN | KG |
|--------|-----|-----|------------|------------|----|----|-----|-----|----|-------|----|------|
| 1/2" | 15 | 15 | 60 | 9894040000 | 15 | 38 | 60 | 45 | 9 | 8,5 | 16 | 0,20 |
| 3/4" | 20 | 10 | 40 | 9894050000 | 19 | 45 | 78 | 50 | 10 | 17 | 16 | 0,29 |
| 1" | 25 | 10 | 40 | 9894060000 | 24 | 48 | 92 | 55 | 11 | 27 | 16 | 0,37 |
| 1"1/4 | 32 | 6 | 24 | 9894070000 | 32 | 51 | 108 | 60 | 11 | 50 | 16 | 0,57 |
| 1"1/2 | 40 | 4 | 16 | 9894080000 | 37 | 58 | 125 | 70 | 13 | 82,5 | 16 | 0,82 |
| 2" | 50 | 4 | 8 | 9894100000 | 47 | 62 | 145 | 80 | 13 | 136,5 | 16 | 1,21 |
| 2"1/2 | 65 | 2 | 4 | 9894120000 | 60 | 78 | 175 | 100 | 16 | 240 | 16 | 2,09 |
| 3" | 80 | 2 | 4 | 9894140000 | 72 | 80 | 200 | 100 | 16 | 340 | 16 | 2,69 |
| 4" | 100 | - | 3 | 9894180000 | 93 | 98 | 240 | 120 | 19 | 550 | 16 | 4,80 |

Limiti di temperatura: -10°C +100°C in assenza di vapore.

Applicazioni



DRINKING
WATER



HEATING



HVAC



COMPRESSED
AIR



INDUSTRIAL



MARINE