




Valvola a sfera per gas a passaggio totale, filettatura femmina con raccordo per contatore gas, serratura di sicurezza e morosità, estraibile e sostituibile.

## Specifiche tecniche

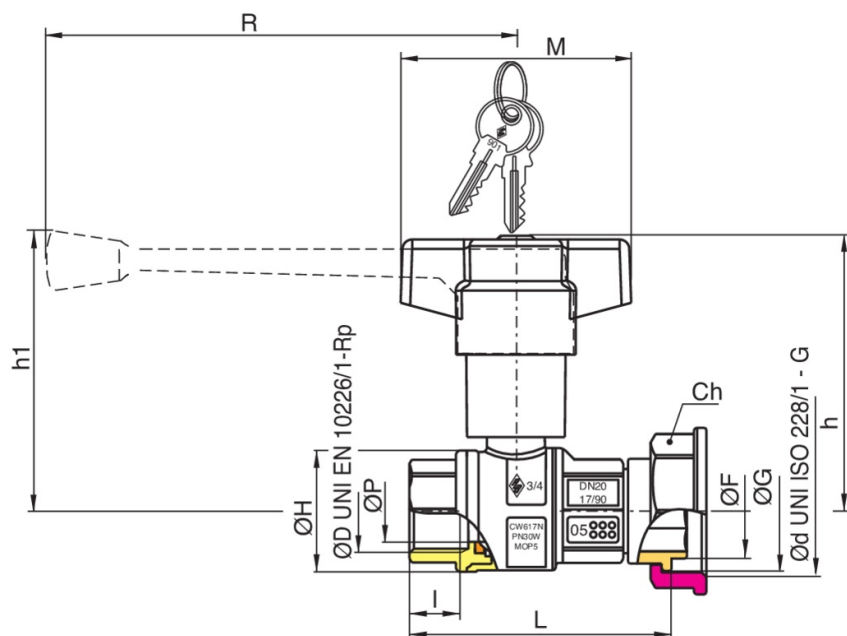

| ØD X ØD      | MASTER BOX | CODICE     | ØP | I    | CH | ØH | L     | H  | H1  | ØF | ØG   | M  | R   | MOP | KG   |
|--------------|------------|------------|----|------|----|----|-------|----|-----|----|------|----|-----|-----|------|
| 3/4" x 1"1/4 | 25         | 9639280925 | 20 | 16,3 | 46 | 39 | 85,5  | 86 | -   | 31 | 39,5 | 70 | -   | 5   | 0,66 |
| 1" x 1"1/4   | 25         | 9639290925 | 25 | 19,1 | 46 | 49 | 102,5 | 90 | -   | 31 | 39,5 | 70 | -   | 5   | 0,86 |
| *1"1/2 x 2"  | 5          | 9639690925 | 40 | 21,4 | 63 | 73 | 130   | -  | 119 | 46 | 57   | -  | 160 | 5   | 2,15 |
| *2" x 2"1/2  | 5          | 9639700925 | 50 | 25,7 | 80 | 87 | 151   | -  | 128 | 59 | 72,5 | -  | 160 | 5   | 3,02 |

Limiti di temperatura: -20°C +60°C.

\*Versione con leva in alluminio.

## Applicazioni



GAS



MULTIUTILITY ONLY