


100300

Válvula de fondo a paso reducido, roscas hembra/hembra UNI ISO 228/1-G, con filtro en acero inoxidable.



Especificaciones técnicas

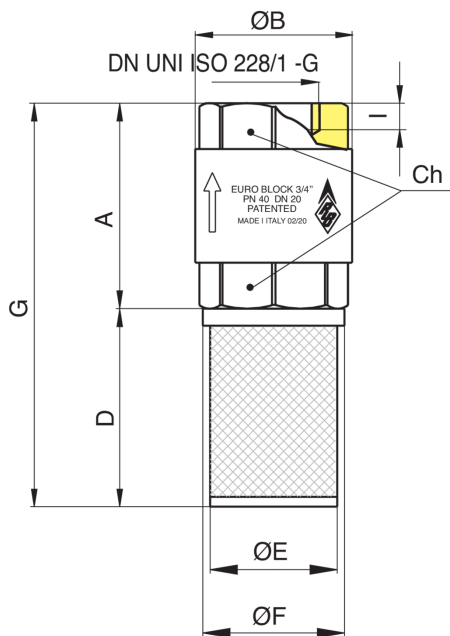

TAMAÑO	DN	BOX	MASTER BOX	CÓDIGO	I	CH	ØB	A	D	ØE	ØF	G	KV	PN	KG
1/2"	15	15	60	10030004	12	25	28	44,5	43	23	26	87,5	3,7	40	0,10
3/4"	20	10	40	10030005	12	31	34,5	47,5	48	29	32	95,5	5,8	40	0,17
1"	25	10	40	10030006	14,5	38	42	56	48	38	41	104	8,6	25	0,27
1"1/4	32	6	12	10030007	16	48	52	62	57	45	49	119	13,8	25	0,43
1"1/2	40	4	8	10030008	18	54	61	70	68	50	55	138	20,2	16	0,62
2"	50	2	8	10030010	19	67	73	78	83	62	67	161	30,9	16	0,93
2"1/2	65	2	4	10030012	24	83	90	92	83,5	82	86	175,5	48,8	12	1,48
3"	80	1	2	10030014	29	98	113	113,5	99	94	99	212,5	79,4	12	2,51
4"	100	1	2	10030018	32	128	139	126,8	115	117	122	241,8	124,9	10	4,41

Temperature range: -20°C +100°C.

Aplicaciones



DRINKING
WATER