


1711

Robinet à boisseau sphérique à passage total, taraudée M/F, avec poignée en acier.

Spécifications techniques

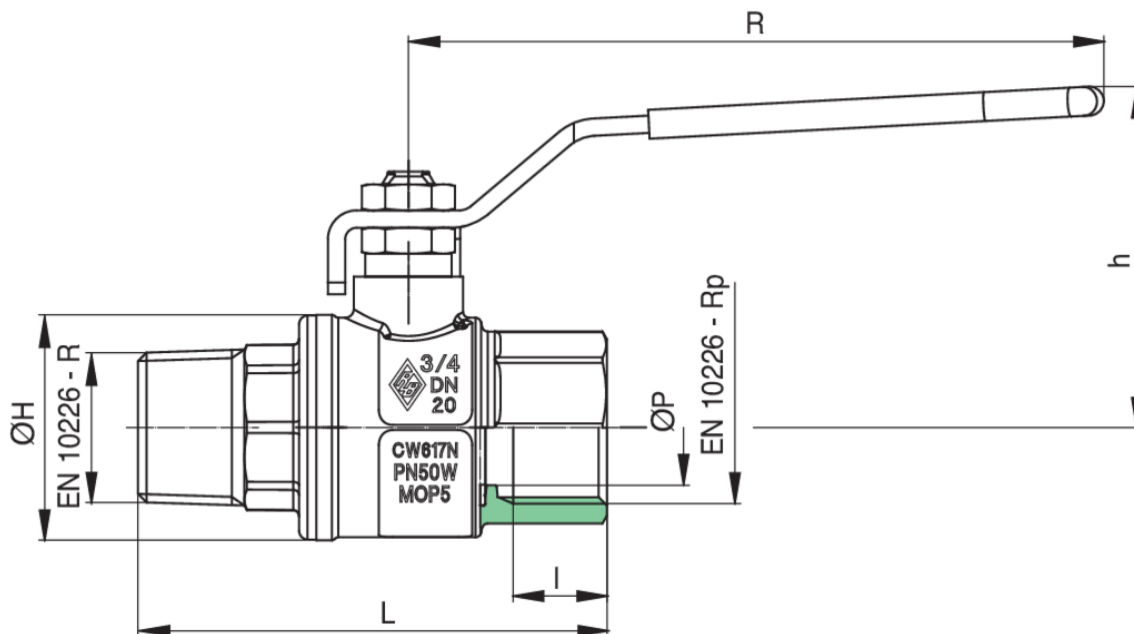

TAILLE	DN	BOX	MASTER BOX	CODE	ØP	I	L	ØH	CH	R	H	KV	PN	KG
1/4"	8	20	80	1711020000	10	11	59	23	20	95	43	5,4	64	0,15
3/8"	10	20	80	1711030000	10	11,4	59,5	23	20	95	43	6	64	0,15
1/2"	15	20	80	1711040000	15	15	72,5	33	25	95	47	16,3	64	0,23
3/4"	20	10	40	1711050000	20	16,3	81,5	39	31	120	59	29,5	50	0,39
1"	25	10	20	1711060000	25	19,1	94,5	49	38	120	63	43	50	0,57
1 1/4"	32	6	12	1711070000	32	21,4	111	59	48	150	76	89	50	0,97
1 1/2"	40	4	8	1711080000	40	21,4	119	73	54	150	82	230	40	1,33
2"	50	2	4	1711100000	50	25,7	141,5	86	67	160	95	265	40	2,06
2 1/2"	65	2	4	1711120000	65	30,2	175	111	90	205	122	540	25	4,14
3"	80	-	4	1711140000	80	33,3	203,5	136	105	205	133	873	25	6,36
4"	100	-	2	1711180000	100	39,3	250	166	130	260	166	1390	25	11,88

Temperature range: -20°C +160°C.

Applications



DRINKING WATER



HEATING



HVAC



COMPRESSED AIR



INDUSTRIAL



MARINE